


POWER DISTRIBUTION UNIT WITH UK SOCKET



NORDEN Power Distribution Units are designed and manufactured for cabinets. The product is equipped with sockets meeting different Industrial systems and standards. Products can be produced according to customer's special requirement, the dimension can reach up to 4600 mm if required for product installation.

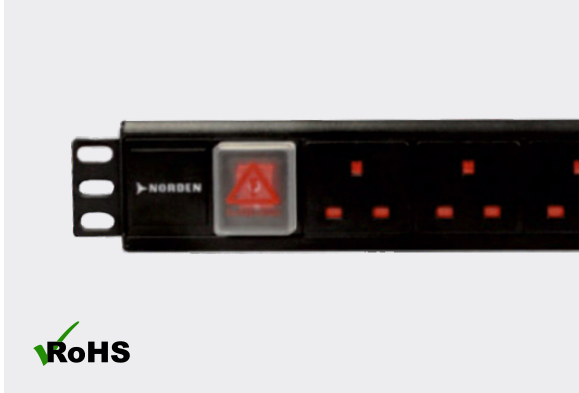

COMPLIANCE

EMC & safety: -EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3, FCC Part 15 Class A, ICES-003, PSE, UL Listed, VCCI Class A, VDE
 Environmental: RoHS, REACH: Contains No SVHCs
 Socket/Outlet Standard: BS1363
 Cable plug: C14/C20 main plug

DESIGN & MATERIALS

Material of Construction	PC/ABS alloy, High Impact FR thermoplastic -UL94-V0
Shell Material & Colour	Aluminium, black
Outlet Qty.	6 way
Plug Type	C14 / C20 Main Plug
Power Input Style	Left end single input style
Bracket Installation Style	Frontal Installation Style
Control function	Switch
Lead length	3m
Commando Plug protection	IP 44

ELECTRICAL & ENVIRONMENTAL DATA

Current Rating	10A/16A 250VAC
Maximum load current available in	10A/16A
Input frequency	50 or 60 Hz
Maximum load capacity	4KW Or 8KW
Operating Environment	-5 °C to +45 °C
Operating Relative Humidity	5 – 95 %
Operating Elevation	0-3000 metres
Storage Temperature	-25 °C to +65 °C
Storage Relative Humidity	5 – 95 %
Storage Elevation	0-15000 meter

POWER DISTRIBUTION UNIT WITH UK SOCKET

ORDERING INFORMATION

Part Number	Description
143E-606E06N002X	6way PDU with UK socket outlets, 10Amp, 3 mtr cable length, and C14 main plug
1448-206E06N002X	6way PDU with UK socket outlets, 16Amp, 3 mtr cable length, and C20 main plug
1448-212E12N00EX-G	12way PDU with UK socket outlets, 16Amp, 1 mtr cable [LSZH Jacket] with C20 plug

X: R1(RAL 9004), R2(RAL 7035), R3(RAL 9010)
G: LSZH Jacket Cable

PACKING INFORMATION

PDU	Packing Qty.	Packing Mode	N.W (kg)	G.W (kg)	Dimension (mm)
6 Way PDU	10 x 1	Carton Box	13.0	14.0	510 x 190 x 310
12 Way PDU	10 x 1	Carton Box	17.0	19.0	920 x 420 x 260