

# 4MP FIXED BULLET CAMERA



## ENV-HCB7F-30R-91

### FEATURES


4 mm Fixed Lens

Smart IR up to 30 m (Upgradable to 50 m)

ONVIF Profile (S, G, T)

Built-in Mic

PoE, IP67

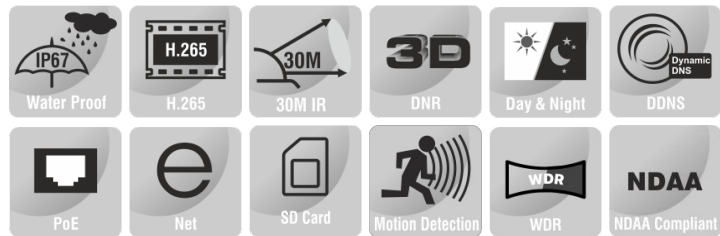

### SPECIFICATION

MODEL	Model No.	ENV-HCB7F-30R-91
	Type	4MP FIXED BULLET CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 4.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	Fixed
	Focal Length	4 mm
	Iris	Fixed
	Lens Mount	M12
	Angle of View (H)	80.0°
	Angle of View (V)	58.1°
	Angle of View (D)	98.9°
	Angle Adjustment	Bracket; Pan: 0~360°, Tilt: 0~75°, Rotate: 0~360°
	Aperture	F1.6
	Electronic Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	3D DNR
	S/N Ratio	≥60 dB
	Defog	Smart Defog
WDR	120 dB	
Smart IR	Up to 30 m (Upgradable to 50 m)	
IR LEDs	2	
Warm Light Distance	Up to 15 m	
Warm light LEDs	2	
Wavelength	850 nm	

# 4MP FIXED BULLET CAMERA



## ENV-HCB7F-30R-91


MODEL	Model No.	ENV-HCB7F-30R-91
	Type	4MP FIXED BULLET CAMERA
DORI	Lens	4 mm
	Detection	80.0 m
	Observation	31.7 m
	Recognition	16.0 m
	Identification	8.0 m
VIDEO	Max. Resolution	2592x1520
	Video Compression	Enhanced (H.265, H.264), H.265, H.264
	Frame Rate	Main Stream: (2592x1520, 2560x1440) @ 24fps, (2304x1296, 1920x1080, 1280x720) @ 30fps, (2592x1520, 2560x1440, 2304x1296, 1920x1080, 1280x720) @ 25fps Sub Stream: (704x480, 704x240, 640x360, 352x240) @ 30fps, (704x576, 704x288, 640x360, 352x288) @ 25fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate (1~30fps), SVC
	Video Bit Rate	32 kbps ~ 6 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Hue, Sharpness, Rotation/Mirror, Gain, Exposure, Day/Night
	White Balance	Auto, Semi Auto, Sunshine, Daylight, Warm Light, Filament, Nature Light, Lock WB, Manual
	Corridor Mode	N/A
	HLC	Supported
	BLC	Supported
	OSD	Up to 1 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes (16x16, 32x32, 48x48, 64x64)
	ROI	Up to 8 regions
	Privacy Mask	Up to 4 regions
AUDIO	Audio Compression	G.711A, G.711U, ADPCM_D
	Audio Bit Rate	8 kbps, 32 kbps, 48 kbps
	Audio I/O	N/A
	Built-in Mic	Supported with noise cancellation
	Built-in Speaker	N/A
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire)
	Intelligent Identification	N/A
	Statistical Analysis	N/A
	Alarm Management	Motion Detection, Tampering (Masking), IP Address Conflict, Pre/Post Alarm Recording, Alarm Recording/Snapshot
INTERFACE	Protocols	TCP/IP, UDP, IPv4, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTSP, NTP, UPnP, Unicast, P2P, QoS, ARP
	Security	AES 128 Encryption, IP Filter, User Authentication (Multiple Privilege Level)
	Compatibility	ONVIF Profile (S, G, T), SDK/API/CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	N/A
	Serial Interface	N/A
	USB	N/A
	Edge Storage	Micro SD Card Slot, Up to 512 GB
	ANR	Supported
	Cable Interface	Pig Tail
	Max. User	32
Remote Connection	≤2	
Web Language	15	
Client Application	EyeConnect	
GENERAL	Power Supply	12V DC, PoE (IEEE 802.3af)
	Max. Power Consumption	≤6 W (12V DC), ≤7 W (PoE)
	Working Temperature	-45 °C ~ 65 °C
	Working Humidity	≤95% RH (non-condensing)
	Ingress Protection	IP67
	Vandal Resistant	IK10 (Housing)
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	161x68x66 mm
Net Weight	0.48 kg	

# 4MP FIXED BULLET CAMERA



## ENV-HCB7F-30R-91

Dimension Unit : mm

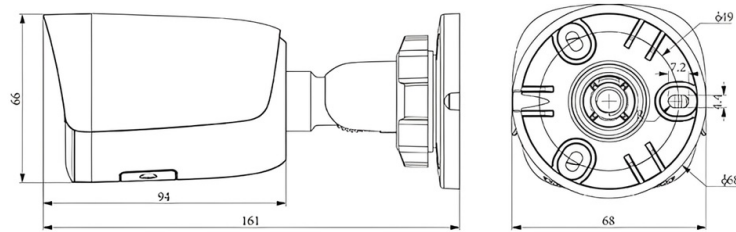

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENV-HCB7F-30R-91	4MP Lowlight IR IP H.265 Compact Bullet Camera with 4mm Fixed Lens, PoE, WDR, SD Card Slot, Built-inMic, 30m IR (Upgradable to 50m) and 15m Warm Light Support	1
ENB-BTUH66	Outer Corner Bracket for Norden Bullet Camera	1
ENB-BTEJ67	Junction Box for Norden Fixed Lens Mini Bullet Camera	1
ENB-BTUV66	Pole Mount Bracket for Norden Bullet Camera	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENV-HCB7F-30R-91	Carton Box	0.65	215x95x120