

5MP FIXED BULLET CAMERA



ENV-HCB8F-30R-91

FEATURES

- 4 mm (2.8mm Optional) Fixed Lens
- Smart IR Up to 30 m (Upgradable to 50 m)
- ONVIF Profile (S, G, T)
- Built-in Mic
- PoE, IP67



SPECIFICATION

MODEL	Model No.	ENV-HCB8F-30R-91
	Type	5MP FIXED BULLET CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 5.0 MegaPixel
	Day / Night	Dual IR Cut Filter with Auto Switch
	Lens Type	Fixed
	Focal Length	4 mm (Optional 2.8 mm)
	Iris	Fixed
	Lens Mount	M12
	Angle of View (H)	80.0° (Optional 94.7°)
	Angle of View (V)	58.1° (Optional 71.2°)
	Angle of View (D)	98.8° (Optional 118.4°)
	Angle Adjustment	Bracket; Pan: 0~360°, Tilt: 0~75°, Rotate: 0~360°
	Aperture	F1.6
	Electronic Shutter	1s ~ 1/100,000s, Auto/Manual
	Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	3D DNR
	S/N Ratio	≥60 dB
Defog	Smart Defog	
WDR	120 dB	
Smart IR	Up to 30 m (Upgradable to 50 m)	
IR LEDs	2	
Wavelength	850 nm	

★Product specification and availability are subject to change without notice.

5MP FIXED BULLET CAMERA



ENV-HCB8F-30R-91


MODEL	Model No.	ENV-HCB8F-30R-91
	Type	5MP FIXED BULLET CAMERA
DORI	Lens	4 mm (Optional 2.8 mm)
	Detection	80.0 m (Optional 56.0 m)
	Observation	31.7 m (Optional 22.2 m)
	Recognition	16.0 m (Optional 11.2 m)
	Identification	8.0 m (Optional 5.6 m)
VIDEO	Max. Resolution	2592x1944
	Video Compression	Enhanced (H.265, H.264), H.265, H.264
	Frame Rate	Main Stream: (2592×1944, 2592×1520) @ 20fps, (2560×1440) @ 25fps, (2304×1296, 1920×1080, 1280×720) @ 25/30fps Sub Stream: (704×480, 704×240, 640×360, 352×240) @ 30fps, (704×576, 704×288, 640×360, 352×288) @ 25fp
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate, SVC
	Video Bit Rate	32 kbps ~ 6 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Hue, Sharpness, Rotation/Mirror, Gain, Exposure, Day/Night
	White Balance	Auto, Semi Auto, Sunshine, Daylight, Warm Light, Filament, Nature Light, Lock WB, Manual
	Corridor Mode	N/A
	HLC	Supported
	BLC	Supported
	OSD	Up to 1 regions
	OSD Type	Title, Week, Date, Time, Text with Different Colors and Adaptable Sizes (16×16, 32×32, 48×48)
	ROI	Up to 8 regions
	Privacy Mask	Up to 4 regions
AUDIO	Audio Compression	G.711A, G.711U, ADPCM_LD
	Audio Bit Rate	8 kbps, 32 kbps, 48 kbps
	Audio I/O	N/A
	Built-in Mic	Supported with noise cancellation
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire)
	Intelligent Identification	N/A
	Statistical Analysis	N/A
	Alarm Management	Motion Detection, Tampering (Masking), IP Address Conflict
INTERFACE	Protocols	TCP/IP, UDP, IPv4, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTSP, NTP, UPnP, Unicast, P2P, QoS, ARP
	Security	AES 12 Video Encryption, IP Filter, User Authentication (Multiple Privilege Level)
	Compatibility	ONVIF Profile (S, G, T), SDK/API/CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	N/A
	Serial Interface	N/A
	USB	N/A
	Edge Storage	Micro SD Card Slot, Up to 512 GB
	ANR	Supported
	Cable Interface	Pig Tail
	Remote Connection	≤2
	Max Users	32
Web Language	15	
Client Application	EyeConnect	
GENERAL	Power Supply	12V DC, PoE (IEEE 802.3af)
	Max. Power Consumption	≤6 W (12V DC), ≤7 W (PoE)
	Working Temperature	-40 °C ~ 65°C
	Working Humidity	≤95% RH (non-condensing)
	Ingress Protection	IP67
	Vandal Resistant	IK10 (Housing)
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	161×68×66 mm
Net Weight	0.52 kg	

5MP FIXED BULLET CAMERA



ENV-HCB8F-30R-91

Dimension Unit : mm

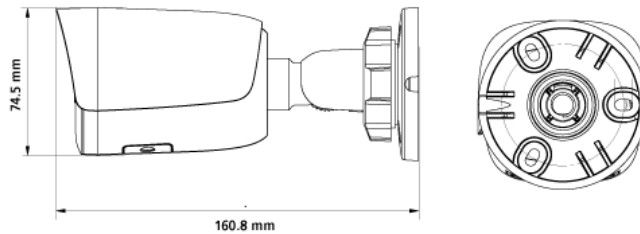

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENV-HCB8F-30R-91	5MP Low Light IR IP H.265 Compact Bullet Camera with 4mm Fixed Lens, PoE, WDR, SD Card Slot, Built-in Mic and 30m IR Support	1
ENB-BTUH66	Outer Corner Bracket for Norden Bullet Camera	1
ENB-BTEJ67	Junction Box for Norden Fixed Lens Mini Bullet Camera	1
ENB-BTUV66	Pole Mount Bracket for Norden Bullet Camera	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENV-HCB8F-30R-91	Carton Box	0.65	215x95x120