

# 2MP FIXED BULLET CAMERA



**ENC-HCB5F-50R-94**

## FEATURES

- Starlight Illumination
- 4 mm (Optional 2.8 mm) Fixed Lens
- Smart IR up to 50 m
- ONVIF Profile (S, G, T, M)
- Triple Stream
- Audio and Alarm Support
- PoE, IP67



## SPECIFICATION

MODEL		ENC-HCB5F-50R-94
Type		2MP FIXED BULLET CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 2.0 MegaPixel
	Day / Night	Dual IR Cut Filter with Auto Switch
	Lens Type	Fixed
	Focal Length	4 mm (Optional 2.8 mm)
	Focus	Fixed
	Iris Type	Fixed Iris
	Lens Mount	M12
	Angle of View (H)	85.1° (Optional 101.3°)
	Angle of View (V)	44.9° (Optional 71.2°)
	Angle of View (D)	95.5° (Optional 118.5°)
	Angle Adjustment	Bracket; Pan: 0~360°, Tilt: 0~75°, Rotate: 0~360°
	Aperture	F1.6
	Electronic Shutter	1s ~ 1/100,000s, Auto/Manual
	Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	3D DNR
S/N Ratio	≥60 dB	
Defog	Smart Defog	
WDR	120 dB	
Smart IR	Up to 50 m	
Wavelength	850 nm	

★Product specification and availability are subject to change without notice.

# 2MP FIXED BULLET CAMERA



## ENC-HCB5F-50R-94

MODEL	Model No.	ENC-HCB5F-50R-94
	Type	2MP FIXED BULLET CAMERA
DORI	Lens	4 mm (Optional 2.8 mm)
	Detection	80.0 m (Optional 56.0 m)
	Observation	31.7 m (Optional 22.2 m)
	Recognition	16.0 m (Optional 11.2 m)
	Identification	8.0 m (Optional 5.6 m)
VIDEO	Max. Resolution	1920x1080
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (1920×1080, 1280×720, 704×480, 640×480) @ 30fps, (1920×1080, 1280×720, 704×576, 640×480)@ 25fps Sub Stream: (704×480, 704×240, 640×360, 352×240) @ 30fps, (704×576, 704×288, 640×360, 352×288) @ 25fps Third Stream: (704×480, 704×240, 352×240) @ 30fps, (704×576, 704×288, 352×288) @ 25fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate (1~30FPS), SVC
	EIS	Supported
	Video Bit Rate	32 kbps ~ 8 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Hue, Sharpness, Rotation/Mirror, Gain, Exposure, Day/Night
	White Balance	Auto, Semi Auto, Sunshine, Daylight, Warm Light, Filament, Nature Light, Lock WB, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Up to 5 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes (16×16, 32×32, 48×48, 64×64), Image overlay
	ROI	Up to 8 regions
	Privacy Mask	Up to 4 regions
	Heatmap	Supported
AUDIO	Audio Compression	G.711A, G.711U, ADPCM_D, AAC_LC
	Audio Bit Rate	8 kbps, 32 kbps, 48 kbps
	Audio I/O	1/1
	Built-in Mic	Supported with noise cancellation
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering, Running, Abandoned Object (Object Left), Missing Object (Object Lost), Parking
	Statistical Analysis	Face Detection (Capture), People Counting, Crowd Detection, On Duty Detection, Human & Vehicle Classification, Abnormal Video & Audio Detection
	Alarm Management	Motion Detection, Tampering (Masking), Input & Output Event, IP & MAC Address Conflict, Disk Alarm (Full & RW Error), FTP Server Exception, Abnormal Voltage, Pre/Post Alarm Recording, Alarm Recording/Snapshot
	Alarm Notification	E-mail (Notification and Snapshot), HTTP (Alarm Icon), FTP (Snapshot and Recording), SD Card (Recording)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, RTMP, PPPoE, NTP, UPnP, SMTP, SFTP, IGMP, NFS, 802.1x, QoS, Unicast, Multicast, SNMP, ARP, P2P
	Security	AES 128 Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T, M), SDK/API/CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1/1
	Edge Storage	Micro SD Card Slot, up to 512 GB
	ANR	Supported
	Cable Interface	Pig Tail
	Remote Connection	≤7
	Max. Users	32
Web Language	15	
Client Application	EyeConnect	

★Product specification and availability are subject to change without notice.


# 2MP FIXED BULLET CAMERA



## ENC-HCB5F-50R-94

<b>MODEL</b>	<b>Model No.</b>	<b>ENC-HCB5F-50R-94</b>
	<b>Type</b>	2MP FIXED BULLET CAMERA
<b>GENERAL</b>	<b>Power Supply</b>	12V DC, PoE
	<b>Max. Power Consumption</b>	≤6.5 W (12V DC), ≤10.5 W (PoE)
	<b>Working Temperature</b>	-40 °C ~ 65 °C
	<b>Working Humidity</b>	≤95% RH (non-condensing)
	<b>Ingress Protection</b>	IP67
	<b>Vandal Resistant</b>	IK10 (Housing)
	<b>Surge Protection</b>	TVS4000V
	<b>Reset Button</b>	Supported
	<b>Dimensions</b>	161x68x66 mm
	<b>Net Weight</b>	0.50 kg

Dimension Unit : mm

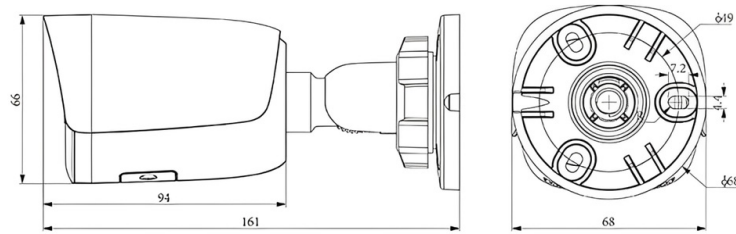

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HCB5F-50R-94	2MP Starlight IR IP H.265 Bullet Camera with 4mm(Optional 2.8mm) Fixed Lens, PoE, WDR, SD Card Slot, Built-in Mic, Smart Analytics and 50m IR Support	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HCB5F-50R-94	Carton Box	0.6	215x95x120

★Product specification and availability are subject to change without notice.