


# 12MP BOX CAMERA



**ENC-HBLCO-00R-65**

## FEATURES

12MP Resolution  
ONVIF Profile (S, G, T, M)  
Triple Stream  
Auto Back Focus  
Audio and Alarm Support  
PoE

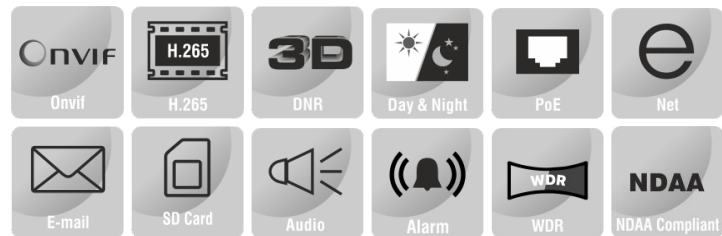

## SPECIFICATION

MODEL	Model No.	ENC-HBLCO-00R-65
	Type	12MP BOX CAMERA
CAMERA	Image Sensor	1/1.7" CMOS Progressive 12.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	C/CS Mount
	Iris Type	DC Iris
	Aperture	F1.2
	Electronic Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.001 Lux @ F1.2, B/W: 0 Lux (External IR LED ON)
	AGC	Auto / Manual
	Digital Zoom	16x
	Digital Noise Reduction	2D & 3D DNR, Auto / Manual
	S/N Ratio	≥55 dB
	Defog	Smart Defog
WDR	120 dB	

# 12MP BOX CAMERA



## ENC-HBLCO-00R-65

MODEL	Model No.	ENC-HBLCO-00R-65
	Type	12MP BOX CAMERA
VIDEO	Max. Resolution	4000x3000
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (4000x3000, 4096x2160, 3840x2160, 1920x1080, 1280x720) @ 25fps Sub Stream: (704x576, 640x480, 352x288) @ 25/30fps Third Stream: (640x480, 352x288, 320x240) @25/30fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Video Bit Rate	100 kbps ~ 16 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night, Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Day/Night, Tungsten, Fluorescent, Shadow, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Up to 8 Regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes
	ROI	Up to 8 Regions
Privacy Mask	Up to 4 Regions	
AUDIO	Audio Compression	G.711A, G.711U, RAW_PCM
	Audio Bit Rate	64Kbps, 128Kbps
	Audio I/O	1/1
	Built-in Mic	Supported
	Two-Way Communication	Supported
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering
	Statistical Analysis	Face Detection (Capture), People Counting, Human & Vehicle Classification, Wrong Way Detection
	Alarm Management	Motion Detection, Input & Output Event, Network Alarm, Disk Alarm, Day / Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot, Scheduled / Manual Alarm
	Alarm Notifications	E-mail (Notification and Snapshot), HTTP (Alarm Icon), FTP (Snapshot and Recording), SD Card (Recording)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, 802.1X, Unicast, Multicast, QoS, ARP, SNMP, SSL/TLS1.2, RTMP (Optional)
	Security	AES 128/256 Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication, HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T, M), SDK / CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1/1
	CVBS Output	Supported
	Edge Storage	Micro SD Card Slot, up to 1TB
	ANR	Supported
	Remote Connection	≤10
	Max User	32
	Web Language	15
Client Application	EyeGuard	
GENERAL	Power Supply	12V DC, PoE (IEEE 802.3af)
	Max. Power Consumption	≤3 W
	Working Temperature	-40 °C ~ 60 °C
	Working Humidity	≤95% RH
	Casing	Metal
	Vandal Resistant	IK10 (Housing)
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	150.2x75x69.7 mm
Net Weight	0.4 kg	


★Product specification and availability are subject to change without notice.

# 12MP BOX CAMERA



ENC-HBLCO-00R-65

Dimension Unit : mm

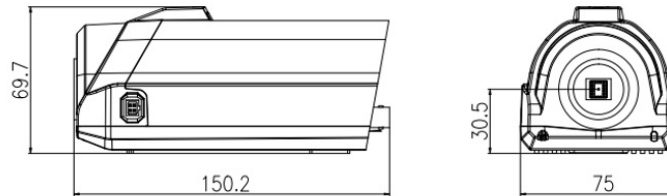

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBLCO-00R-65	12MP Starlight IR IP H.265 Box Camera with CS Mount Lens Interface, Built-in Mic, WDR, PoE and SD Card Slot and Smart Analytics (without Lens)	1

## PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBLCO-00R-65	Carton Box	-	-