


EIA RS-232 APPLICATION 24 AWG CABLE

The Overall Foil Shielded Paired Cable from NORDEN is suitable to use for RS-232 low speed hand shake applications. The 24 AWG Cable is constructed with PVC insulation, 100 % Aluminium Foil Polyester Tape Overall Shielded and a PVC Outer Jacket.

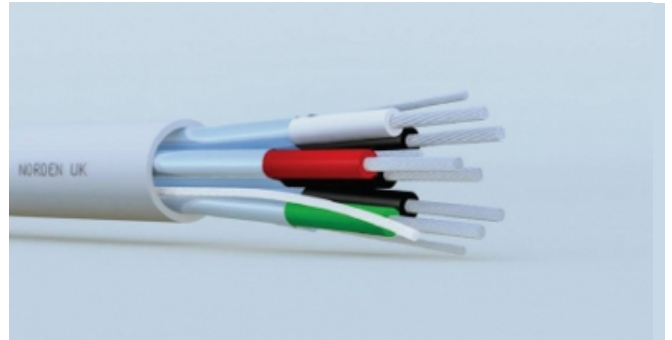

CABLE CONSTRUCTION

Conductor

Tinned Copper

Insulation

PVC (PVC Sheath) or PE (LSZH Sheath)

Rip Cord

Nylon

Screen

Al-Polyester Tape Foil (100 % Coverage)

Drain Wire

Stranded Tinned Copper [24 AWG 7x30]

Sheath

PVC or LSZH

Sheath Color

Grey

Standard Packing Mode

305 mtr / Plywood Reel

INSULATION COLOR CODE

Individual Pair	Colour	Individual Pair	Colour
1	Black/Red	6	Black/Brown
2	Black/White	7	Black/Orange
3	Black/Green	8	Red/White
4	Black/Blue	9	Red/Green
5	Black/Yellow	10	Red/Blue

ORDERING INFORMATION

▷ 24 AWG Overall Foil Shielded PVC

Part Number	Number of Pair(s)	Conductor Size		Outer Diameter (mm)	Weight (kg/km)
		AWG	Stranded		
76-1201241	1	24	7x32	3.9	17.8
76-1202241	2	24	7x32	5.6	38.6
76-1203241	3	24	7x32	5.8	38.7
76-1204241	4	24	7x32	6.7	47.6
76-1206241	6	24	7x32	7.3	65.4
76-1208241	8	24	7x32	8.2	83.3
76-1210241	10	24	7x32	9.3	101.2

▷ 24 AWG Overall Foil Shielded LSZH

Part Number	Number of Pair(s)	Conductor Size		Outer Diameter (mm)	Weight (kg/km)
		AWG	Stranded		
76-3201242	1	24	7x32	4.2	18.3
76-3202242	2	24	7x32	5.8	40.2
76-3203242	3	24	7x32	6.2	41.3
76-3204242	4	24	7x32	6.9	50.6
76-3206242	6	24	7x32	7.5	68.3
76-3208242	8	24	7x32	8.4	87.9
76-3210242	10	24	7x32	9.5	108.6