


2MP MOTORIZED VANDAL DOME CAMERA



ENC-HVD5M-40R-69

FEATURES

- 2.7 ~ 13.5 mm Motorized Lens
- Smart IR up to 40 m (Upgradable to 50 m)
- ONVIF Profile (S, G, T, M)
- Quad Stream
- Audio and Alarm Support
- PoE, IK10, IP67

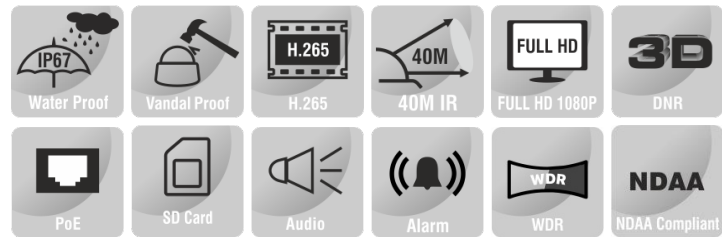

SPECIFICATION

MODEL		Model No.	ENC-HVD5M-40R-69
CAMERA	Type	2MP MOTORIZED VANDAL DOME CAMERA	
	Image Sensor	1/2.8" CMOS Progressive 2.0 MegaPixel	
	Day/Night	IR Cut Filter with Auto Switch	
	Lens Type	Motorized	
	Focal Length	2.7 ~ 13.5 mm	
	Digital Zoom	16x	
	Focus	Auto / Manual	
	Iris Type	Fixed Iris	
	Angle of View (H)	101.0° ~ 28.0°	
	Angle of View (V)	54.0° ~ 16.0°	
	Angle of View (D)	114.0° ~ 32.2°	
	Aperture Range	F1.6	
	Angle Adjustment	Pan 0~355°, Tilt 0~75°, Rotate 0~355°	
	Electronic Shutter	1s ~ 1/100,000s, Auto / Manual	
	Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0 lux with IR on	
	AGC	Auto / Manual	
Digital Noise Reduction	2D & 3D DNR, Auto / Manual		
S/N Ratio	≥55 dB		
Defog	Smart Defog		
WDR	120 dB		
Smart IR	Up to 40 m (Upgradable to 50 m)		
Wavelength	850 nm		

★Product specification and availability are subject to change without notice.

2MP MOTORIZED VANDAL DOME CAMERA



ENC-HVD5M-40R-69

MODEL	Model No.	ENC-HVD5M-40R-69
	Type	2MP MOTORIZED VANDAL DOME CAMERA
DORI	Lens	2.7 ~ 13.5 mm
	Detection	48 ~ 152 m
	Observation	19.2 ~ 60.8 m
	Recognition	9.6 ~ 30.4 m
	Identification	4.8 ~ 15.2 m
VIDEO	Max. Resolution	1920x1080
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (1920x1080, 1280x720) @ 25/30fps Sub Stream: (704x576, 640x480, 640x360, 352x288, 320x240) @ 25/30fps Third Stream: (640x480, 352x288, 320x240) @ 25/30fps Fourth Stream: 640x480, 352x288, 320x240) @ 25/30fps (Optional)
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night, Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Day/Night, Tungsten, Fluorescent, Shadow, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Up to 8 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes, Image overlay
	ROI	Up to 8 regions
	Privacy Mask	Up to 4 regions
AUDIO	Audio Compression	G.711A, G.711U, RAW_PCM
	Audio Bit Rate	64 kbps, 128 kbps
	Audio I/O	1/1
	Built-in Mic	Supported (Optional)
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering, Multi Loitering, Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Face Detection, People Counting, Human & Vehicle Detection, Abnormal Audio Detection, Wrong Way Detection, Illegal Parking, Tampering / Masking / Scene Change, Abnormal Speed
	Alarm Management	Motion Detection, Tampering (Masking), Input & Output Event, Network Alarm, Disk Alarm, Day Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
	Alarm Notifications	E-mail (Notification and Snapshot), HTTP (Alarm Icon), FTP (Snapshot and Recording), SD Card (Recording)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, 802.1X, Unicast, Multicast, QoS, ARP, SNMP, SSL/TLS1.2, RTMP (Optional)
	Security	AES 128/256 Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T, M), SDK/CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1/1
	Edge Storage	Micro SD Card Slot, up to 512 GB
	ANR	Supported
	Cable Interface	Pig Tail
	Remote Connection	≤10
	Max User	32
Web Language	15	
Client Application	EyeGuard	

★Product specification and availability are subject to change without notice.


2MP MOTORIZED VANDAL DOME CAMERA



ENC-HVD5M-40R-69

MODEL		ENC-HVD5M-40R-69
Type		2MP MOTORIZED VANDAL DOME CAMERA
GENERAL	Power Supply	12V DC, PoE (IEEE 802.3af)
	Max. Power Consumption	≤7.5 W
	Working Temperature	-40 °C ~ 65 °C
	Working Humidity	≤95% RH (non-condensing)
	Casing	Metal
	Ingress Protection	IP67
	Vandal Resistant	IK10
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	Φ130x113.3 mm
Net Weight	0.8 Kg	

Dimension Unit : mm

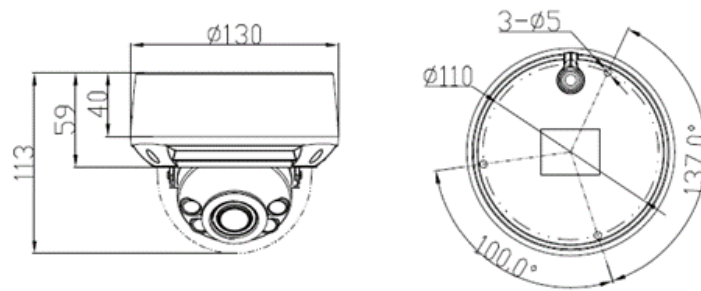

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HVD5M-40R-69 (With 40m IR)	2MP H.265 IR IP Vandal Proof Dome Camera with 2.7 to 13.5mm Motorized Lens, WDR, PoE, SD Card Slot, Smart Analytics and 40m IR Support	1
ENC-HVD5M-40R-69 (With 50m IR)	2MP H.265 IR IP Vandal Proof Dome Camera with 2.7 to 13.5mm Motorized Lens, WDR, PoE, SD Card Slot, Smart Analytics and 50m IR Support	1
ENC-HVD5M-40R-69 (With 40m IR and Built in Mic)	2MP H.265 IR IP Vandal Proof Dome Camera with 2.7 to 13.5mm Motorized Lens, WDR, PoE, SD Card Slot, Built in Mic, Smart Analytics and 40m IR Support	1
ENC-HVD5M-40R-69 (With 50m IR and Built in Mic)	MP H.265 IR IP Vandal Proof Dome Camera with 2.7 to 13.5mm Motorized Lens, WDR, PoE, SD Card Slot, Built in Mic, Smart Analytics and 50m IR Support	1
ENB-BCDJ67	Junction Box for Norden Dome Camera	1
ENB-BCDQ66	Pendent Cap for Norden Dome Camera	1
ENB-BCDP66	Pendant Mount for Norden Dome Camera	1
ENB-BCDW66	Wall Mount Bracket for Norden Dome Camera	1
ENB-BCDV66	Pole Mount Bracket for Norden Dome Camera	1
ENB-BCPH65	Corner Mount Bracket for Dome Camera	1

★Product specification and availability are subject to change without notice.

2MP MOTORIZED VANDAL DOME CAMERA



ENC-HVD5M-40R-69

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HVD5M-40R-69	Carton Box	-	-