


# 2 Core 14 AWG Shielded Multi Conductor Cable - PVC

The Shielded Multi Conductor Cable from NORDEN is suitable to use within Audio, Control and Instrumentation purpose. The cable is constructed with PVC Insulation, 100 % Aluminium Foil – Polyester Tape Shielded and PVC outer jacket.

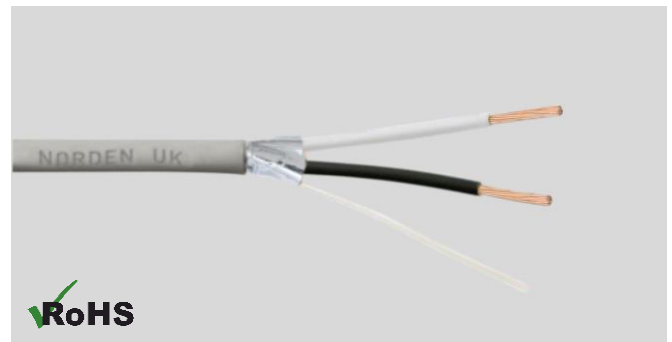

## CABLE CONSTRUCTION

**Conductor**  
Bare Copper

**Shielding**  
100% Aluminium Foil - Polyester Tape

**Outer Jacket**  
PVC (Polyvinyl Chloride)

**Insulation**  
PVC

**Drain Wire**  
Tinned Copper

**Jacket Color**  
Grey

## PHYSICAL CHARACTERISTICS


Characteristic	Value
No. of Conductor	2
Conductor Size	14 AWG 19 x 27
Insulation Diameter	2.36 mm
Insulation Thickness	0.7 mm
Drain Wire Size	22 AWG 7 x 30
Jacket Thickness	1.1 mm
Jacket Diameter	5.70 mm
Max. Recommended Pulling Tension	557 N
Min. Bending Radius Minor Axis	45.6 mm
Operating Temperature	-10°C to +60°C

## ELECTRICAL CHARACTERISTICS

Characteristic	Unit	Value
Nom. Conductor DCR	Ω/km	8.5
Dielectric Strength between Pairs	KV/5min	1.5
Max. Operating Voltage UL	V rms	300

## MECHANICAL CHARACTERISTICS

Characteristic	Value
Test Material	PVC/LSZH
Before Tensile Strength (Mpa)	≥ 13.8
Aging Elongation (%)	≥ 100
After Tensile Strength (Mpa)	≥ 10.35
Aging Elongation (%)	≥ 75
Cold Bend (-20±°C x 4 hrs)	No Crack

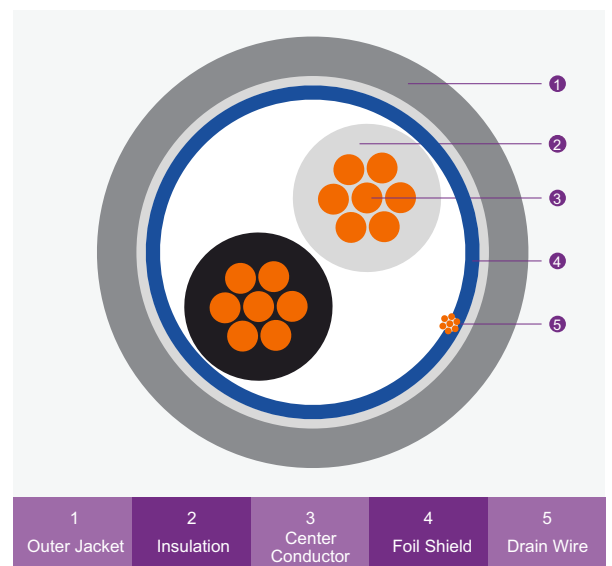

# 2 Core 14 AWG Shielded Multi Conductor Cable - PVC

## INSULATION COLOUR CODE

Individual Core	Colour
Core 1	Black
Core 2	White

## ORDERING INFORMATION

Part Number	Description	Net Weight (Kg/Km)
71-1202141	2 Core 14 AWG Shielded Multi-Conductor Cable PVC	69.2