

4CH EMBEDDED NETWORK VIDEO RECORDER



ENR-01004-N-FK

FEATURES


4 Channel Input

Support Enhanced (H.265, H.264), H.265, H.264 Video Formats

1 SATA HDD

HDMI and VGA Simultaneous Output

ONVIF Profile (S, G, T, M)

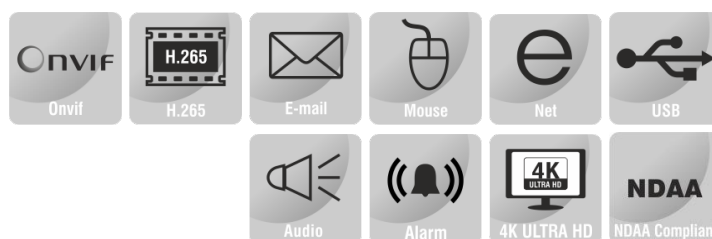

SPECIFICATION

MODEL	Model No.	ENR-01004-N-FK
	Type	4CH EMBEDDED NETWORK VIDEO RECORDER
VIDEO & AUDIO	Video Input	4-Ch
	Incoming Bandwidth	40 Mbps
	Outgoing Bandwidth	40 Mbps
	HDMI / VGA Output	HDMI: 3840×2160, 1920×1080, 1280×1024, 1024×768 VGA: 1920×1080, 1280×1024, 1024×768
	Audio I/O	1 Ch Input / 1 Ch Output
	Two-way Audio	Supported
	Multi-screen Display	1/4
	Video Encryption	Supported
	OSD Type	Channel Name, Date
DECODING	Video Compression	Enhanced (H.265, H.264), H.265, H.264
	Audio Compression	G.711A, G.711U
	Bit Rate Type	CBR, VBR
	Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/720P/D1
	Recording Mode	Manual, Schedule (Regular, Continuous), Event
	Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
	Simultaneous Live Decoding Capability	1x12MP, 4x4MP
	Synchronous Playback	4/1
MONITORING	Live View Functions	Snapshot, Record, Digital Zoom, Record, PTZ Toolbar, Volume Adjustment, Image Setting
	Playback functions	Sync playback, Play, Pause, Stop, Fast play, Slow play, Full Screen, Backup selection, Snapshot, Search by events, Picture grid
	Search Mode	Time/Date, Alarm, Picture grid, Event
	Backup Mode	USB, Network
	Export Video Format	MP4
	Export Picture Format	JPG

★Product specification and availability are subject to change without notice.



4CH EMBEDDED NETWORK VIDEO RECORDER



ENR-01004-N-FK

MODEL	Model No.	ENR-01004-N-FK
	Type	4CH EMBEDDED NETWORK VIDEO RECORDER
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP/RTSP/RTCP, PPPoE, NTP, UPnP, QoS, SMTP, IGMP, 802.1X, NFS, Unicast, Multicast, ARP, SNMP, SSL, Telnet, SFTP (SSH), P2P, 3G/4G
	Compatibility	ONVIF Profile (S, G, T, M), SDK/CGI
	Network	2xRJ45 (10/100 Mbps) Self Adaptive Ethernet Port
	HDMI Interface	1xHDMI
	VGA Interface	1xVGA
	USB Interface	2xUSB 2.0
	Alarm I/O	4/1
SMART	Alarm Management	Input & Output event, Alarm I/O error, IP Conflict, Network Interrupt, Hard disk full, No hard disk, Hard disk R/W error, HDD SMART check error, Abnormal recording, Motion detection, Tampering (Masking), Smart detection, Video loss
	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Analytics	Loitering, Multi Loitering, Abandoned object (Object Left), Missing object (Object Lost), People Counting, Wrong Way Detection, Abnormal Speed, Illegal Parking *Compatible with analytic supported cameras
	Face Comparison	Real-Time Captured and Displayed Face Comparison Findings (Registrant (Name and ID), Stranger, Channel, Similarity) *Compatible with -68, -69, -70, -71 Series
STORAGE	SATA	1 SATA Interfaces
	Capacity	Up to 12TB
	e-SATA	N/A
GENERAL	Operating System	Embedded Linux
	Remote Users	8
	Client Application	EyeGuard
	Power Supply	12V DC / 3 A
	Redundant Power	N/A
	Max. Power Consumption	≤15 W (without HDD)
	Working Environment	-10 °C ~ 55 °C
	Humidity	≤90% RH
	Chassis	1U
	Dimension	255x235.1x47.5 mm
Net Weight	0.8 kg	

Dimension Unit : mm



ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENR-01004-N-FK	4Ch Embedded Network Video Recorder with 1 HDD Bay Supports 4K Cameras, HDMI, VGA and ONVIF	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENR-01004-N-FK	Carton Box	-	-

★Product specification and availability are subject to change without notice.