
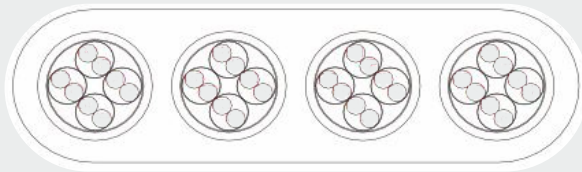


# FLAT ELEVATOR CABLE

Norden flat elevator cable is ideal for internal. The elevator traveling Cat6 cable exceeds Category 6/Class E specs. maximum channel length is 60m.

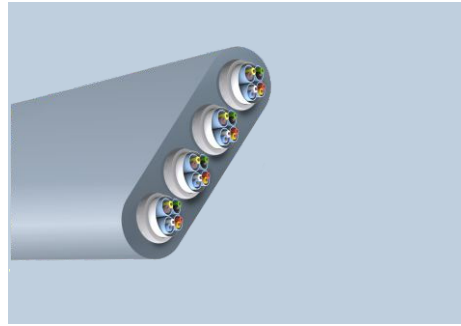

## COMPLIANCE

EN 50214  
Flame Propagation - IEC/EN 60332-1-2

## PRODUCT CLASSIFICATION

Product Sequence	Premium
Product Type	Twisted Pair Cable

## MATERIAL CONSTRUCTION & DESIGN

Conductor Material	Tinned Copper
Conductor Size	0.40mm, 26 AWG
Conductor Construction	Stranded
Insulation Material	PVC
Individual Pair Shield:	Al/PETP foil
Support members:	None
Overall Shield:	Tinned Cu braid shield
Outer Jacket:	PVC/LSZH
Overall Dimension	29.6 x 8.4 mm
Total weight	340 kg/km
Colour Code:	White/blue, red/orange, black/green, yellow/brown (4x)
Total Number of pairs	16
Outer Jacket Color	Grey

## ELECTRICAL & MECHANICAL CHARACTERISTICS

Free Suspension length	48 meters max.
Travel speed	4 m/s max.
Operating Temp.	-15°C to +75°C
Copper Content	72kg/km
Rated Voltage	100V

## ORDERING INFORMATION

Part Number	Description
110-10011516X	Category 6 S/FTP 16 Pair 26 AWG Flat Elevator Cable PVC
110-10012516X	Category 6 S/FTP 16 Pair 26 AWG Flat Elevator Cable LSZH