

## 2 Core 1.5 mm<sup>2</sup> Transparent Loudspeaker Cable

In-wall Speaker cable from NORDEN is suitable to use within Audio and Instrumentation Purposes. The cable is constructed with Stranded Copper Covered Aluminium and a transparent PVC Outer Jacket.



### CABLE CONSTRUCTION

#### Conductor

Stranded Copper Covered Aluminium

#### Outer Jacket


Transparent PVC

#### Jacket Color

Transparent

### PHYSICAL CHARACTERISTICS

Characteristic	Value
No. of Conductor	2
Conductor Stranding	84 x 0.15 ± 0.005mm
Conductor O.D	1.58 mm
Cross Section Area	1.5mm <sup>2</sup>
Outer Jacket	Transparent PVC
Jacket O.D	3.1 - 6.35 ± 0.10mm
Nom. Wall Thickness	0.75mm
Min. Wall Thickness	0.65mm
Operating Temperature	-20°C to +70°C

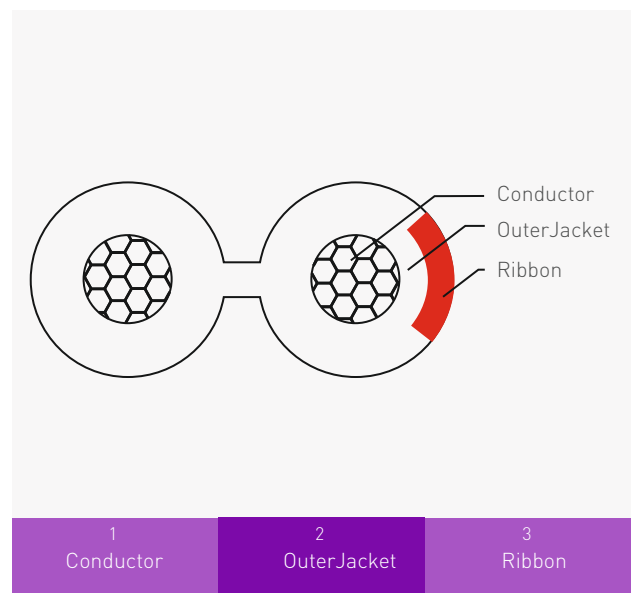

### ELECTRICAL CHARACTERISTICS

Characteristic	Unit	Value
Max. Conductor DCR	Ohm/km	340
Max. Operating Voltage UL	V/min	30

### ORDERING INFORMATION

Part Number	Description
82-1002154X	2x1.5 mm <sup>2</sup> Transparent Loudspeaker Transmission Cable PVC