

4MP FIXED DOME CAMERA



ENC-HCD7F-00R-67

FEATURES

- 4 mm Fixed Lens
- Warm Light Illumination up to 30m
- ONVIF Profile (S, G, T, M)
- Triple Stream
- Audio and Alarm Support
- PoE, IP67



SPECIFICATION

MODEL	Model No.	ENC-HCD7F-00R-67
	Type	4MP FIXED DOME CAMERA
CAMERA	Image Sensor	1/1.8" CMOS Progressive 4.0 MegaPixel
	Day/Night	IR Cut Filter with Auto Switch
	Lens Type	Fixed
	Focal Length	4 mm
	Focus	Fixed
	Iris Type	Fixed Iris
	Angle of View (H)	88.7°
	Angle of View (V)	48.2°
	Angle of View (D)	100.9°
	Angle Adjustment	Pan 0~355°, Tilt 0~80°, Rotate 0~360°
	Electronic Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.0005 lux @ F1.0, BW: 0 lux with light
	AGC	Auto / Manual
	Digital Noise Reduction	2D & 3D DNR, Auto / Manual
	S/N Ratio	≥55 dB
Defog	Smart Defog	
WDR	120 dB	
Warm Light Distance	30 m	
Wavelength	850 nm	

★Product specification and availability are subject to change without notice.

4MP FIXED DOME CAMERA



ENC-HCD7F-00R-67

MODEL	Model No.	ENC-HCD7F-00R-67
	Type	4MP FIXED DOME CAMERA
DORI	Lens	4 mm
	Detection	54.0 m
	Observation	21.6 m
	Recognition	10.8 m
	Identification	5.4 m
VIDEO	Max. Resolution	2560x1440
	Video Compression	Enhanced (H.265,H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (2560×1440, 2304×1296, 1920×1080, 1280×720) @ 25/30fps Sub Stream: (704×576, 640×480, 352×288) @ 25/30fps Third Stream: (640×480, 352×288, 320×240) @ 25/30fps Fourth Stream : Customizable
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night, Mirror/Flip
	White Balance	Auto, Day/Night, Tungsten, Fluorescent, Shadow, Manual
	HLC	Supported
	BLC	Supported
	OSD	Supported
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes, Image overlay
	ROI	Up to 8 regions
	Privacy Mask	Supported
	AUDIO	Audio Compression
Audio Bit Rate		64 kbps, 128 kbps
Audio I/O		1/1
Built-in Mic		Supported
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering, Multi Loitering, Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Face Detection , People Counting, Human & Vehicle Detection, Wrong Way Detection
	Alarm Management	Motion Detection, Tampering (Masking), Input & Output Event, Network Alarm, Disk Alarm, Day Night Switch Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
	Alarm Notification	E-mail(Notification & Snapshot), HTTP(Alarm icon), FTP(Snapshot & Recording), SD Card(Recording)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP/RTSP/RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, Unicast, Multicast, ARP, SNMP, SSL/TLS 1.2
	Security	AES 128/256 Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T, M), SDK/CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1/1
	Edge Storage	Micro SD Card Slot, up to 512 GB
	ANR	Supported
	Max User Access	32
GENERAL	Client Application	EyeGuard
	Power Supply	12V DC/ PoE (IEEE 802.3af)
	Max. Power Consumption	≤6 W
	Working Temperature	-40 °C ~ 65°C
	Working Humidity	≤90% RH (non-condensing)
	Ingress Protection	IP67
	Surge Protection	TVS4000V
	Reset Button	Supported
Dimensions	Φ118x94 mm	
Net Weight	0.55 Kg	


★Product specification and availability are subject to change without notice.

4MP FIXED DOME CAMERA



ENC-HCD7F-00R-67

Dimension Unit : mm

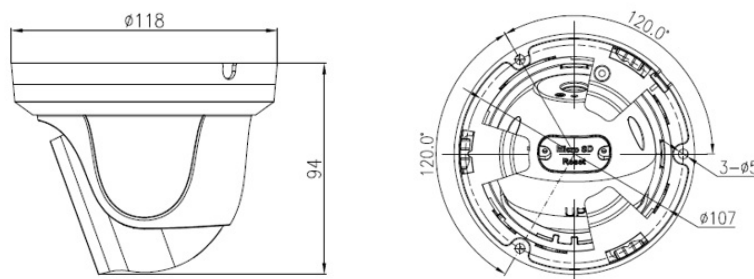

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HCD7F-00R-67	4MP H.265 Full Color Compact Dome Camera with 4mm Lens, WDR, PoE, SD Card Slot , Built-in Mic, Smart Analytics and 30m Illumination Distance Support	1
ENB-BCDJ64	Junction Box for Norden Dome Camera	1
ENB-BCDQ64	Pendant Cap for Norden Dome Camera	1
ENB-BCDP66	Pendant Mount for Norden Dome Camera	1
ENB-BCDW66	Wall Mount for Norden Dome Camera	1
ENB-BCDV66	Pole Mount for Norden Dome Camera	1
ENB-BCDH66	Corner Mount for Norden Dome Camera	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HCD7F-00R-67	Carton Box	-	-