

# 4MP FIXED BULLET CAMERA



**ENC-HBU7F-00R-67**

## FEATURES

4 mm Fixed Lens

Warm Light Illumination up to 40 m

ONVIF Profile (S, G, T, M)

Triple Stream

Audio and Alarm Support

PoE, IP67



## SPECIFICATION

MODEL	Model No.	ENC-HBU7F-00R-67
	Type	4MP FIXED BULLET CAMERA
CAMERA	Image Sensor	1/1.8" CMOS Progressive 4.0 MegaPixel
	Day/Night	Fixed Filter
	Lens Type	Fixed
	Focal Length	4 mm
	Focus	Fixed
	Iris Type	Fixed Iris
	Angle of View (H)	88.7°
	Angle of View (V)	48.2°
	Angle of View (D)	100.9°
	Angle Adjustment	Pan 0~360°, Tilt 0~90°, Rotate 0~360°
	Aperture	F1.0
	Electronic Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.0005 lux @ F1.0, 0 lux with Illuminator on
	AGC	Auto / Manual
	Digital Noise Reduction	2D & 3D DNR, Auto / Manual
S/N Ratio	≥55 dB	
Defog	Smart Defog	
WDR	120 dB	
Warm Light Distance	Up to 40 m	
Warm Light LEDs	4	
Wavelength	850 nm	

★Product specification and availability are subject to change without notice.

# 4MP FIXED BULLET CAMERA



## ENC-HBU7F-00R-67

MODEL	Model No.	ENC-HBU7F-00R-67
	Type	4MP FIXED BULLET CAMERA
DORI	Lens	4 mm
	Detection	54.0 m
	Observation	21.6 m
	Recognition	10.8 m
	Identification	5.4 m
VIDEO	Max. Resolution	2560x1440
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (2560x1440, 2304x1296, 1920x1080, 1280x720) @ 25/30fps Sub Stream: (704x576, 640x480, 352x288) @ 25/30fps Third Stream: (640x480, 352x288, 320x240) @ 25/30fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night, Mirror/Flip
	White Balance	Auto, Day/Night, Tungsten, Fluorescent, Shadow, Manual
	HLC	Supported
	BLC	Supported
	OSD	Up to 8 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes, Image overlay
	ROI	Up to 8 regions
	Privacy Mask	Up to 4 regions
AUDIO	Audio Compression	G.711A, G.711U, RAW_PCM
	Audio Bit Rate	64 kbps, 128 bps
	Audio I/O	1/1
	Built-in Mic	Supported
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering
	Statistical Analysis	Face Detection , People Counting, Human & Vehicle Detection, Wrong Way Detection
	Alarm Management	Motion Detection, Tampering (Masking), Input & Output Event, Network Alarm, Disk Alarm, Day Night Switch Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
INTERFACE	Alarm Notification	E-mail (Notification and Snapshot), HTTP (Alarm Icon), FTP (Snapshot and Recording), SD Card (Recording)
	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP/RTSP/RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, Unicast, Multicast, ARP, SNMP, SSL/TLS 1.2
	Security	AES 128/256 Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), Prevent Brute-Force Attack, Signed Firmware, 802.1X Authentication (EAP-TLS), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log , AES 128/256 SD Card Encryption, WSS
	Compatibility	ONVIF Profile (S, G, T, M), SDK/CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1/1
	Edge Storage	Micro SD Card Slot, up to 512 GB
	Built-in Speaker	Supported
	ANR	Supported
	Cable Interface	Pig Tail
	Remote Connection	≤10
Web Language	15	
Max User	32	
Client Application	EyeGuard	


# 4MP FIXED BULLET CAMERA



**ENC-HBU7F-00R-67**

<b>MODEL</b>	<b>Model No.</b>	<b>ENC-HBU7F-00R-67</b>
	<b>Type</b>	4MP FIXED BULLET CAMERA
<b>GENERAL</b>	<b>Power Supply</b>	12V DC , PoE (IEEE 802.3af)
	<b>Max. Power Consumption</b>	≤7.5 W
	<b>Working Temperature</b>	-40 °C ~ 65 °C
	<b>Working Humidity</b>	≤95% RH (non-condensing)
	<b>Casing</b>	Metal + Plastic
	<b>Ingress Protection</b>	IP67
	<b>Vandal Resistant</b>	IK10 (Housing)
	<b>Surge Protection</b>	TVS4000V
	<b>Reset Button</b>	Supported
	<b>Dimensions</b>	242.6x87.7x97.2 mm
	<b>Net Weight</b>	0.83 Kg

Dimension Unit : mm

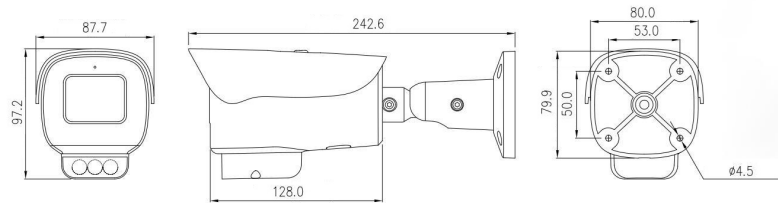

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU7F-00R-67	4MP H.265 Full Color Bullet Camera with 4mm Lens, WDR, PoE, SD Card Slot , Built-in Mic & Speaker, Smart Analytics and 40m Warm light Illumination Support	1
ENB-BCUJ67	Junction Box for Norden Bullet Camera	1
ENB-BCUV67	Pole Mount Bracket for Norden Bullet Camera	1

## PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBU7F-00R-67	Carton Box	-	-