

# 5MP FIXED BULLET CAMERA



## ENC-HCB8F-50R-92

### FEATURES

- Starlight Illumination
- 4 mm (2.8 mm Optional) Fixed Lens
- Smart IR Up to 50 m
- ONVIF Profile (S, G, T)
- Triple Stream
- Audio and Alarm Support
- PoE, IP67



### SPECIFICATION

MODEL	Model No.	ENC-HCB8F-50R-92
	Type	5MP FIXED BULLET CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 5.0 MegaPixel
	Day / Night	Dual IR Cut Filter with Auto Switch
	Lens Type	Fixed
	Focal Length	4 mm (2.8 mm Optional)
	Focus	Fixed
	Iris	Fixed
	Lens Mount	M12
	Angle of View (H)	80.0° (Optional 94.7°)
	Angle of View (V)	58.1° (Optional 71.2°)
	Angle of View (D)	98.9° (Optional 118.5°)
	Digital Zoom	16x
	Angle Adjustment	Bracket; Pan: 0~360°, Tilt: 0~90°, Rotate: 0~360°
	Aperture	F1.6
	Electronic Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	3D DNR
S/N Ratio	≥60 dB	
Defog	Smart Defog	
WDR	120 dB	
Smart IR	Up to 50 m	
IR LEDs	2	
Wavelength	850 nm	

★Product specification and availability are subject to change without notice.

# 5MP FIXED BULLET CAMERA



## ENC-HCB8F-50R-92

<b>MODEL</b>	<b>Model No.</b>	<b>ENC-HCB8F-50R-92</b>
	Type	5MP FIXED BULLET CAMERA
<b>DORI</b>	Lens	4 mm (Optional 2.8 mm)
	Detection	80.0m (Optional 56.0 m)
	Observation	31.7 m (Optional 22.2 m)
	Recognition	16.0 m(Optional 11.2 m)
	Identification	8.0 m(Optional 8.0 m)
<b>VIDEO</b>	Max. Resolution	2592x1944
	Video Compression	Enhanced (H.265,H.264), H.265, H.264
	Frame Rate	Main Stream: (2592x1944) @ 20fps, (2592x1520, 2560x1440) @ 24/25fps, (2304x1296,1920x1080,1280x720) @ 25/30fps Sub Stream: (704x480, 704x240, 640x360, 352x240) @ 30fps, (704x576, 704x288, 640x360, 352x288) @ 25fps Third Stream: (704x480, 704x240, 640x360, 352x240) @ 5fps, (704x576, 704x288, 640x360, 352x288) @ 5fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate (1~30FPS), SVC
	Video Bit Rate	32 kbps ~ 6 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Hue, Sharpness, Rotation/Mirror, Gain, Exposure, Day/Night
	White Balance	Auto, Semi Auto, Sunshine, Daylight, Warm Light, Filament, Nature Light, Lock WB, Manual
	HLC	Supported
	BLC	Supported
	OSD	Up to 1 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes (16x16, 32x32, 48x48, 64x64)
	ROI	Up to 8 regions
	Privacy Mask	Up to 4 regions
<b>AUDIO</b>	Audio Compression	G.711A, G.711U, ADPCM_D
	Audio Bit Rate	8 kbps, 32 kbps, 48 kbps
	Audio I/O	1/1
	Built-in Mic	Supported with noise cancellation
<b>SMART</b>	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire)
	Intelligent Identification	N/A
	Statistical Analysis	N/A
	Alarm Management	Motion Detection, Mask Alarm, IP Address Conflict
<b>INTERFACE</b>	Protocols	TCP/IP, UDP, IPv4, ICMP, HTTP, HTTPS, DHCP, DNS, DDNS, RTSP, NTP, FTP, UPnP, P2P, Unicast, ARP, TLS 1.2
	Security	AES 128 Video Encryption, IP Filter, User Authentication (Multiple Privilege Level)
	Compatibility	ONVIF Profile (S, G, T), SDK/API/CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1/1
	Edge Storage	Micro SD Card Slot, Up to 512 GB
	ANR	Supported
	Cable Interface	Pig Tail
	Remote Connection	≤2
	Max. Users	32
Web Language	15	
Client Application	EyeConnect	


# 5MP FIXED BULLET CAMERA



## ENC-HCB8F-50R-92

<b>MODEL</b>	<b>Model No.</b>	<b>ENC-HCB8F-50R-92</b>
	<b>Type</b>	5MP FIXED BULLET CAMERA
<b>GENERAL</b>	<b>Power Supply</b>	12V DC, PoE (IEEE 802.3af)
	<b>Max. Power Consumption</b>	≤6.5 W (12V DC), ≤7 W (PoE)
	<b>Working Temperature</b>	-40 °C ~ 65 °C
	<b>Working Humidity</b>	≤95% RH (non-condensing)
	<b>Ingress Protection</b>	IP67
	<b>Vandal Resistant</b>	IK10 (Housing)
	<b>Surge Protection</b>	TVS4000V
	<b>Reset Button</b>	Supported
	<b>Dimensions</b>	161x68x66 mm
	<b>Net Weight</b>	0.31 Kg

Dimension Unit : mm

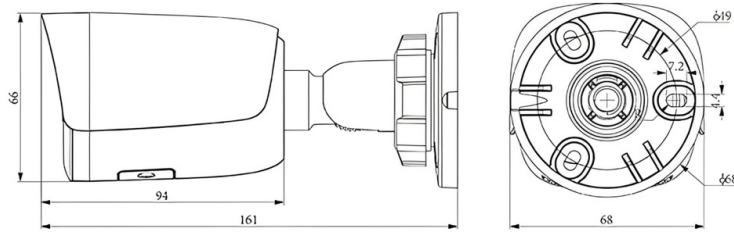

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HCB8F-50R-92	5MP Starlight IR IP H.265 Compact Bullet Camera with 4mm (Optional 2.8mm) Fixed Lens, PoE, WDR, SD Card Slot, Built-in Mic and 50m IR Support	1
ENB-BTEJ67	Junction Box for Norden Fixed Lens Mini Bullet Camera	1
ENB-BTUH66	Outer Corner Bracket for Norden Bullet Camera	1
ENB-BTUV66	Pole Mount Bracket for Nordenr Bullet Camera	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HCB8F-50R-92	Carton Box	0.47	195x195x105