

POWER DISTRIBUTION UNIT – UK SOCKET / IEC 60309 PLUG



NORDEN Power Distribution Units are designed and manufactured for cabinets. The product is equipped with sockets meeting different systems and standards. Products can be produced accordingly to customer's special requirement, the dimension can reach to 4600 mm, required for product installation.


COMPLIANCE

EMC & safety:-EN 55022 Class A,EN 55024,EN 61000-3-2, EN 61000-3-3,FCC Part 15 Class A, ICES-003,PSE, VCCI Class A,VDE
 Environmental: RoHS, REACH: Contains No SVHCs
 Socket/Outlet Standard: BS1363
 Cable Plug: IEC 60309

DESIGN & MATERIALS

Material of Construction	PC/ABS alloy, High Impact FR thermoplastic –UL94-V0
Shell Material & Colour	Aluminium, Black
Outlet Qty.	As per requirement
Power Input Style	Right end style
Bracket Installation Style	Bracket Installation Style
Control function	16 Amp or 32 Amp Switch
LED Light	Yes
Lead length	5 m (Other cable length available on request)

DRAWING

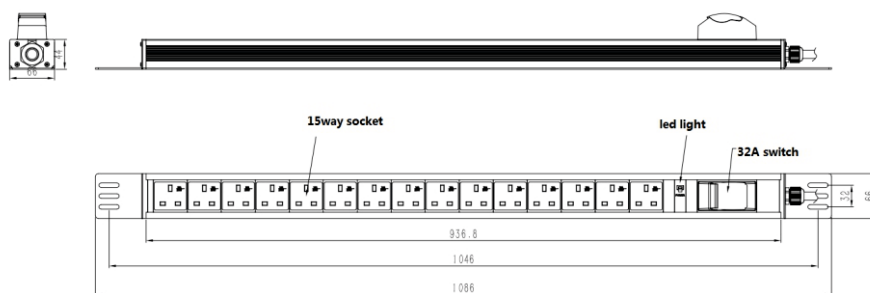

ELECTRICAL & ENVIRONMENTAL DATA

Current Rating	32A , 250 VAC
Maximum load current available in	32A
Input frequency	50 or 60 Hz
Maximum load capacity	4KW
Operating Environment	-5 °C to +45 °C
Operating Relative Humidity	5 – 95 %
Operating Elevation	0-3000 metres
Storage Temperature	-25 °C to +65 °C
Storage Relative Humidity	5 – 95 %
Storage Elevation	0-15000 metres

POWER DISTRIBUTION UNIT – UK SOCKET / IEC 60309 PLUG

ORDERING INFORMATION

Part Number	Description
16 Amp PDU	
158N-204E04N003X-F	04 Way UK Socket PDU with MCB , 16 Amp , IEC 60309 Plug with Earth Terminals, 5-meter LSZH Cable ,19" Installation
158N-208E08N003X-F	08 Way UK Socket PDU with MCB , 16 Amp , IEC 60309 Plug with Earth Terminals , 5-meter LSZH Cable ,Vertical Installation
32 Amp PDU	
158N-415E15N003X	15 Way UK Socket PDU with MCB , 32 Amp , IEC 60309 Plug with 5 meter Cable Length , Vertical Installation

X : BK (Black)

F : PDU with 16A Switch, Earth Terminals and LSZH Jacket Cable Plug