

# 2MP MOTORIZED BULLET CAMERA



## ENV-HBU5M-40R-58

### FEATURES

2.7~13.5 mm Motorized Lens

Smart IR up to 40 m

ONVIF Profile (S, G, T, M)

Triple Stream

Audio and Alarm Support

PoE, IP67



### SPECIFICATION

MODEL	Model No.	ENV-HBU5M-40R-58
	Type	2MP MOTORIZED BULLET CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 2.0 MegaPixel
	Day/Night	IR Cut Filter with Auto Switch
	Lens Type	Motorized
	Focal Length	2.7~ 13.5 mm
	Digital Zoom	16x
	Focus	Auto / Manual
	Iris Type	Fixed Iris
	Angle of View (H)	101.3° ~ 29.3°
	Angle of View (V)	54.4°~ 12.6°
	Angle of View (D)	114.9° ~ 31.8°
	Angle Adjustment	Bracket; Pan 0°~360°, Tilt 0°~90°, Rotate 0°~360°
	Aperture	F1.6 ~ F3.1
	Electronic Shutter	1/5s ~ 1/20,000s, Auto / Manual
	Min. Illumination	Color: 0.01 lux @ F1.6, B/W: 0 lux with IR on
	AGC	Auto / Manual
Digital Noise Reduction	2D & 3D DNR, Auto / Manual	
S/N Ratio	≥55 dB	
Defog	Smart Defog	
WDR	120 dB	
Smart IR	Up to 40 m	
Wavelength	850 nm	

★Product specification and availability are subject to change without notice.

# 2MP MOTORIZED BULLET CAMERA



## ENV-HBU5M-40R-58

MODEL	Model No.	ENV-HBU5M-40R-58
	Type	2MP MOTORIZED BULLET CAMERA
DORI	Lens	2.7 mm ~ 13.5 mm
	Detection	48.0 m ~ 140.0 m
	Observation	19.2 m ~ 56.0 m
	Recognition	9.60 m ~ 28.0 m
	Identification	4.80 m ~ 14.0 m
VIDEO	Max. Resolution	1920x1080
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (1920x1080, 1280x720) @ 25/30fps Sub Stream: (704x576, 640x480, 352x288) @ 25/30fps Third Stream: (640x480, 352x288, 320x240) @ 25/30fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night (Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Day/Night, Tungsten, Fluorescent, Shadow, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Total 8 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes, Image overlay
	ROI	Up to 8 regions
	Privacy Mask	Up to 4 regions
AUDIO	Audio Compression	G.711A, G.711U, RAW_PCM
	Audio Bit Rate	64 kbps, 128 kbps
	Audio I/O	1/1
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering
	Statistical Analysis	Face Detection (Capture), People Counting, Human & Vehicle Classification, Abnormal Audio Detection, Wrong Way Detection, Illegal Parking
	Alarm Management	Motion Detection, Input & Output Event, Network Alarm, Disk Alarm, Day Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
	Alarm Notification	E-mail (Notification and Snapshot), HTTP (Alarm Icon), FTP (Snapshot and Recording), SD Card (Recording)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, 802.1X, Unicast, Multicast, QoS, ARP, SNMP, SSL/TLS1.2, RTMP (Optional)
	Security	AES 128/256 Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T, M), SDK/CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1/1
	Edge Storage	Micro SD Card Slot, up to 512 GB
	ANR	Supported
	Cable Interface	Pig Tail
	Remote Connection	≤10
	Max. User	32
Web Language	15	
GENERAL	Client Application	EyeGuard
	Power Supply	12V DC, PoE (IEEE 802.3af)
	Max. Power Consumption	≤5.5 W (IR ON), ≤2.5 W (IR OFF)
	Working Temperature	-40°C ~ 65°C
	Working Humidity	≤90% RH (non-condensing)
	Casing	Metal
	Ingress Protection	IP67
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	232x80x80 mm
Net Weight	0.78 kg	


★Product specification and availability are subject to change without notice.

# 2MP MOTORIZED BULLET CAMERA



## ENV-HBU5M-40R-58

Dimension Unit : mm

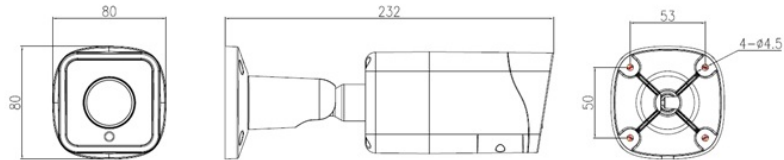

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENV-HBU5M-40R-58	2MP IR IP H.265 Bullet camera with 2.7 to 13.5 mm Motorized Lens, PoE, SD card slot, WDR, Smart Analytics and 40M IR support	1
ENB-BCUJ67	Junction Box for Norden Bullet Camera	1
ENB-BCUV67	Pole Mount Bracket for Norden Bullet Camera	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENV-HBU5M-40R-58	Carton Box	-	-