

5MP MOTORIZED BULLET CAMERA



ENV-HBU8M-40R-58

FEATURES

- 2.7~13.5 mm Motorized Lens
- Smart IR up to 40 m
- ONVIF Profile (S, G, T, M)
- Triple Stream
- Audio and Alarm Support
- PoE, IP67



SPECIFICATION

MODEL		Model No.	ENV-HBU8M-40R-58
CAMERA		Type	5MP MOTORIZED BULLET CAMERA
		Image Sensor	1/2.7" CMOS Progressive 5.0 MegaPixel
		Day/Night	IR Cut Filter with Auto Switch
		Lens Type	Motorized
		Focal Length	2.7~ 13.5 mm
		Digital Zoom	16x
		Focus	Auto / Manual
		Iris Type	Fixed Iris
		Angle of View (H)	102.3° ~ 33.1°
		Angle of View (V)	54.3°~ 18.5°
		Angle of View (D)	115.8° ~ 37.9°
		Angle Adjustment	Bracket; Pan 0°~360°, Tilt 0°~90°, Rotate 0°~360°
		Aperture	F1.6 ~ F3.1
		Electronic Shutter	1/5s ~ 1/20,000s, Auto / Manual
		Min. Illumination	Color: 0.01 lux @ F1.6, B/W: 0 lux with IR
AGC	Auto / Manual		
Digital Noise Reduction	2D & 3D DNR, Auto / Manual		
S/N Ratio	≥55 dB		
Defog	Smart Defog		
WDR	120 dB		
Smart IR	Up to 40 m		
Wavelength	850 nm		

★Product specification and availability are subject to change without notice.

5MP MOTORIZED BULLET CAMERA



ENV-HBU8M-40R-58

MODEL	Model No.	ENV-HBU8M-40R-58
	Type	5MP MOTORIZED BULLET CAMERA
DORI	Lens	2.7 mm ~ 13.5 mm
	Detection	80.0 m ~ 208.0 m
	Observation	32.0 m ~ 83.2 m
	Recognition	16.0 m ~ 41.6 m
	Identification	8.0m ~ 20.8 m
VIDEO	Max. Resolution	2880x1620
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (2880x1620, 2560x1440, 2304x1296, 1920x1080, 1280x720) @ 25/30fps Sub Stream: (704x576, 640x480, 352x288) @ 25/30fps Third Stream: (640x480, 352x288, 320x240) @ 25/30fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night (Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Day/Night, Tungsten, Fluorescent, Shadow, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Up to 8 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes, Image overlay
	ROI	Up to 8 regions
	Privacy Mask	Up to 4 regions
AUDIO	Audio Compression	G.711A, G.711U, RAW_PCM
	Audio Bit Rate	64 kbps, 128 kbps
	Audio I/O	1/1
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering
	Statistical Analysis	Face Detection (Capture), People Counting, Human & Vehicle Classification, Abnormal Audio Detection, Wrong Way Detection, Illegal Parking
	Alarm Management	Motion Detection, Input & Output Event, Network Alarm, Disk Alarm, Day Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
	Alarm Notification	E-mail (Notification and Snapshot), HTTP (Alarm Icon), FTP (Snapshot and Recording), SD Card (Recording)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, 802.1X, Unicast, Multicast, QoS, ARP, SNMP, SSL/TLS1.2, RTMP (Optional)
	Security	AES 128/ 256 Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T, M), SDK/CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1/1
	Edge Storage	Micro SD card slot, up to 512 GB
	ANR	Supported
	Max. User	32
Client Application	EyeGuard	
GENERAL	Power Supply	12V DC, PoE (IEEE 802.3af)
	Max. Power Consumption	≤6 W (IR ON), ≤2.5 W (IR OFF)
	Working Temperature	-40°C ~ 65°C
	Working Humidity	≤90% RH (non-condensing)
	Ingress Protection	IP67
	Vandal Resistant	IK10 (Housing)
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	232x80x80 mm
Net Weight	0.78 kg	


★Product specification and availability are subject to change without notice.

5MP MOTORIZED BULLET CAMERA



ENV-HBU8M-40R-58

Dimension Unit : mm

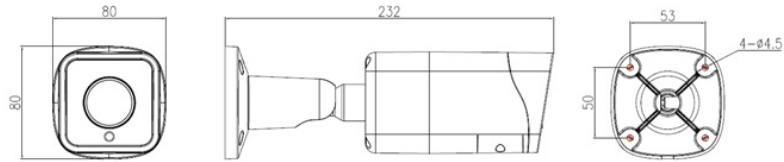

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENV-HBU8M-40R-58	5MP H.265 IR IP Bullet Camera with 2.7 to 13.5mm Motorized lens, WDR, PoE, SD Card Slot, Smart Analytics and 40m IR Support	1
ENB-BCUJ67	Junction Box for Norden Bullet Camera	1
ENB-BCUV67	Pole Mount Bracket for Norden Bullet Camera	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENV-HBU8M-40R-58	Carton Box	-	-