

5MP EXPLOSION PROOF BULLET CAMERA



ENC-HBU8M-50R-24

FEATURES

Starlight Illumination
316L Stainless Steel Construction
2.7 ~ 13.5 mm Motorized Lens
Smart IR up to 50 m (Optional White Light support)
ONVIF Profile (S, G, T, M)
Triple Stream
Wiper Support
ATEX/ IECEx/ CCoE (PESO) Certified
Applicable for GAS Zone 1, Zone 2, Class IIA, IIB, IIC
Applicable for Temperature Classes T1-T6
Applicable for Dust Zone 21, 22
IP68, PoE++



SPECIFICATION

MODEL		ENC-HBU8M-50R-24
Type		5MP EXPLOSION PROOF BULLET CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 5.0 MegaPixel
	Lens Type	Motorized
	Focal Length	2.7 ~ 13.5 mm
	Focus	Auto / Manual
	Iris	Fixed Auto Iris / DC Auto Iris*
	Angle of View (H)	94.2° ~ 29.3°
	Angle of View (V)	70.3° ~ 22.0°
	Angle of View (D)	117.5° ~ 36.6°
	Aperture Range	F1.6 ~ F3.3
	Digital Zoom	16x
	Electronic Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	3D DNR
	S/N Ratio	≥60 dB
Defog	Smart Defog	
WDR	120 dB	
Smart IR	Up to 50 m	
White Light	Up to 50 m (Optional)	
Wavelength	850 nm	

★Product specification and availability are subject to change without notice.

*Available based on requirements

5MP EXPLOSION PROOF BULLET CAMERA



ENC-HBU8M-50R-24

MODEL	Model No.	ENC-HBU8M-50R-24
	Type	5MP EXPLOSION PROOF BULLET CAMERA
DORI	Lens	2.7 ~ 13.5 mm
	Detection	56.0 ~ 240.0 m
	Observation	22.0 ~ 95.0 m
	Recognition	11.0 ~ 48.0 m
	Identification	5.6 ~ 24.0 m
VIDEO	Max. Resolution	2592x1944
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (2592x1944, 2592x1520, 2560x1440, 2304x1296) @ 25 / 30fps, (1920x1080, 1280x720) @ 50 /60fps Sub Stream: (704x480, 704x240, 640x360, 352x240) @ 30fps, (704x576, 704x288, 640x360, 352x288) @ 25fps Third Stream: (1920x1080, 1280x720, 640x360, 704x480, 704x240, 352x240) @ 30fps, (1920x1080, 1280x720, 640x360, 704x576, 704x288, 352x288) @ 25fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	EIS	Supported
	Video Bit Rate	32 kbps ~ 8 Mbps / 100 kbps ~ 12 Mbps*
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Hue, Sharpness, Rotation/Mirror, Gain, Exposure, Day/Night
	White Balance	Auto, Semi Auto, Sunshine, Warm Light, Filament, Nature Light, Lock WB, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Up to 8 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes (16x16, 32x32, 48x48, 64x64), Image overlay
	ROI	Up to 8 regions
Privacy Mask	Up to 8 regions	
AUDIO	Audio Compression	G.711A, G.711U, ADPCM_D, AAC_LC
	Audio Bit Rate	8 Kbps, 32Kbps, 48 Kbps / 64 Kbps, 128 Kbps *
	Audio I/O	1/1
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering, Running, Abandoned Object (Object Left), Missing Object (Object Lost), Parking
	Statistical Analysis	Face Detection , People Counting, Human & Vehicle Detection, Abnormal Video & Audio Detection, Wrong Way Detection, Illegal Parking, Scene Change, Abnormal Speed
	Alarm Management	Motion Detection, Tampering (Masking), Input & Output Event, IP & MAC Address Conflict, Disk Alarm (Full & RW Error), FTP Server Exception, Abnormal Voltage, Pre/Post Alarm Recording, Alarm Recording/Snapshot
INTERFACE	Alarm Notifications	E-mail(Notification & Snapshot), HTTP(Alarm icon), FTP(Snapshot & Recording), SD Card(Recording)
	Protocols	TCP/IP, UDP, IPv4 ,IPv6, ICMP, HTTP, HTTPS, FTP, NFS, DHCP, DNS, DDNS, RTP, RTSP, RTMP, PPPoE, NTP, UPnP, SMTP (SSL/TLS), IGMP, 802.1X, QoS (DSCP), Unicast, Multicast, ARP, SNMP, SSL, P2P
	Security	AES 128/256 Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T, M), SDK/API/CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	2/1 (Customizable)
	Serial Interface	1 x RS485
	Edge Storage	Micro SD Card Slot, up to 512 GB
	ANR	Supported
	Built-in Heater	Supported
Wiper	Supported	
Web Language	15	

★Product specification and availability are subject to change without notice.

*Available based on requirements


5MP EXPLOSION PROOF BULLET CAMERA



ENC-HBU8M-50R-24

MODEL		ENC-HBU8M-50R-24
	Model No.	ENC-HBU8M-50R-24
	Type	5MP EXPLOSION PROOF BULLET CAMERA
GENERAL	Power Supply	110V ~ 240V AC, PoE++ (IEEE 802.3bt), (Optional 24V DC, 48V DC, 24V AC)
	Max. Power Consumption	≤30W (with thermostat)
	Working Temperature	-40 °C ~ 70 °C
	Working Humidity	≤95% RH (non-condensing)
	Atmospheric Pressure	80 kPa ~ 106 kPa
	Window Glass	Strong Tempered Glass
	Sun Shade	Supported
	Surge Protection	TVS4000V
	Ingress Protection	IP68
	Reset Button	Supported
	Dimensions	523x297x221 mm
	Net Weight	15.5 kg

Dimension Unit : mm

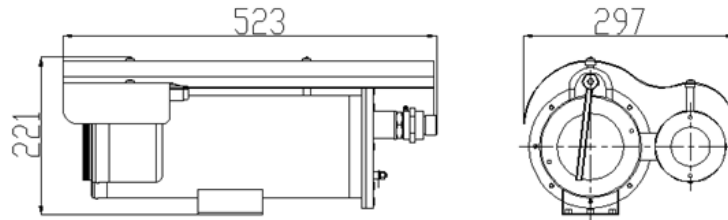

★Product specification and availability are subject to change without notice.

*Available based on requirements

5MP EXPLOSION PROOF BULLET CAMERA



ENC-HBU8M-50R-24

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU8M-50R-24 (With 2.7 to 13.5mm Motorized Lens and 110V ~ 240V AC with IR)	5MP SS316L Explosion Proof IP H.265 Bullet Camera with 2.7 to 13.5mm Motorized Lens, SD Card Slot, WDR, Smart Analytics, Wiper and 50m IR	1
ENC-HBU8M-50R-24 (With 2.7 to 13.5mm Motorized Lens and 110V ~ 240V AC with White Light)	5MP SS316L Explosion Proof IP H.265 Bullet Camera with 2.7 to 13.5mm Motorized Lens, SD Card Slot, WDR, Smart Analytics, Wiper and 50m White Light Support	1
ENC-HBU8M-50R-24 (With 2.7 to 13.5mm Motorized Lens and 48V DC with IR)	5MP SS316L Explosion Proof IP H.265 Bullet Camera with 2.7 to 13.5mm Motorized Lens, SD Card Slot, WDR, Smart Analytics, Wiper and 50m IR	1
ENC-HBU8M-50R-24 (With 2.7 to 13.5mm Motorized Lens and 48V DC with White Light)	5MP SS316L Explosion Proof IP H.265 Bullet Camera with 2.7 to 13.5mm Motorized Lens, SD Card Slot, WDR, Smart Analytics, Wiper and 50m White Light Support	1
ENC-HBU8M-50R-24 (With 2.7 to 13.5mm Motorized Lens and 24 V DC with IR)	5MP SS316L Explosion Proof IP H.265 Bullet Camera with 2.7 to 13.5mm Motorized Lens, SD Card Slot, WDR, Smart Analytics, Wiper and 50m IR	1
ENC-HBU8M-50R-24 (With 2.7 to 13.5mm Motorized Lens and 24 V DC with White Light)	5MP SS316L Explosion Proof IP H.265 Bullet Camera with 2.7 to 13.5mm Motorized Lens, SD Card Slot, WDR, Smart Analytics, Wiper and 50m White Light Support	1
ENC-HBU8M-50R-24 (With 2.7 to 13.5mm Motorized Lens and 24 V AC with IR)	5MP SS316L Explosion Proof IP H.265 Bullet Camera with 2.7 to 13.5mm Motorized Lens, SD Card Slot, WDR, Smart Analytics, Wiper and 50m IR	1
ENC-HBU8M-50R-24 (With 2.7 to 13.5mm Motorized Lens and 24 V AC with White Light)	5MP SS316L Explosion Proof IP H.265 Bullet Camera with 2.7 to 13.5mm Motorized Lens, SD Card Slot, WDR, Smart Analytics, Wiper and 50m White Light Support	1
ENB-BZUW68	Wall Mount Bracket for Norden Explosion Proof Bullet Camera	1
ENB-BZUH68	Corner Mount Bracket for Norden Explosion Proof Bullet Camera	1
ENB-BZUV68	Pole Mount Bracket for Norden Explosion Proof Bullet Camera	1
ENA-EXH010	1 Meter Explosion Proof Hose for Norden Explosion Proof Camera	1
ENA-EXH015	1.5 Meter Explosion Proof Hose for Norden Explosion Proof Camera	1
ENA-EXH020	2 Meter Explosion Proof Hose for Norden Explosion Proof Camera	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBU8M-50R-24	Carton Box	-	-

★Product specification and availability are subject to change without notice.

*Available based on requirements