


DIELECTRIC LOOSE TUBE UNARMoured IN/OUT FIBRE OPTIC CABLE



The cable is constructed with FRP Central Strength Member, two layer tubes with Jelly Compound for double water blocking, Aramid yarn strength member for better tensile strength and rodent protection, and PVC outer Jacket with metric print. Non-metallic structure and good electro-magnetic resistance. The cable is suitable for internal, external and long distance communication system. The cable has options of LSZH, PE & Plenum outer jacket as per customer request.

The cable combines robust characteristics of external cable and flexibility of internal cable. By installing this cable, costly splice at building entry can be avoided and cable can be routed from outside plant to telecommunication closets or main distribution frames (MDF) through the riser of building and eliminate "50 foot rule" for external cables. The cable is mostly used in LAN application for intra building backbone and interconnections (Campus LAN).

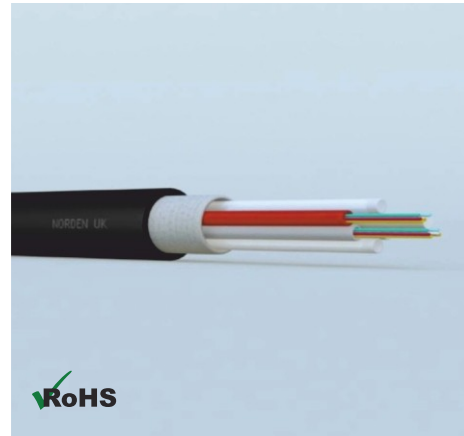



COMPLIANCE

ITU-T G652.B OS1
 ITU-T G652.D/G655/G657.A1/G657.A2 OS2
 ITU-T G651.1 OM1 OM2 OM3 OM4
 IEC60793-2-10 type A1a.1/A1b OM1/OM2
 IEC60793-2-10 type A1a.2 OM3
 IEC60793-2-10 type A1a.3 OM4
 ISO/IEC 11801 , ISO/IEC 24702
 ANSI/TIA/EIA 568.3-D
 ROHS compliant Directive 2002/95/EC
 LSZH: IEC 60332-1, IEC 60754, IEC 61034

MECHANICAL & ENVIRONMENTAL CHARACTERISTICS

Characteristics	Short Term	Long Term
Max. Tensile Load	3000 N	1000 N
Max. Crush Load	2000 N/100 mm	1000 N/100 mm
Operating Temp.	-20°C to +60°C	
Storage Temp.	-40°C to +85°C	
Sheath Material	Standard: PE Optional: LSZH, PVC or other	

ORDERING INFORMATION

Part Number	Fibre Count	Outer Diameter (mm)	Cable Weight (kg/km)	Bend Radius	
				Short (mm)	Long (mm)
3107-31004FXXCL	4	10.0	70.0	20D	10D
3107-31006FXXCL	6	10.0	70.0	20D	10D
3107-31008FXXCL	8	10.0	70.0	20D	10D
3107-31012FXXCL	12	10.0	70.0	20D	10D
3107-31024FXXCL	24	10.0	70.0	20D	10D
3107-31036FXXCL	36	10.0	70.0	20D	10D
3107-31048FXXCL	48	11.5	104.0	20D	10D
3107-31072FXXCL	72	11.5	104.0	20D	10D
3107-31096FXXCL	96	13.6	138.0	20D	10D
3107-31144FXXCL	144	17.5	225.0	20D	10D
3107-31196FXXCL	196	13.5	140.0	30D	15D

DIELECTRIC LOOSE TUBE UNARMoured IN/OUT FIBRE OPTIC CABLE



ORDERING GUIDE

Cable Type	Jacket	Fibre/ Tube	Fibre Count	Fibre Type (FXX)	Jacket Colour (CL)
3107	1=PVC 2=LSZH 3=PE	0=24 F/T 1=12 F/T 2=08 F/T 3=06 F/T 4=04 F/T	No. of Fibre	OM1=62.5/125 OM1 OM2=50/125 OM2 OM3=50/125 OM3 OM4=50/125 OM4 OS1=9/125 [G652.B] OS1 OS2=9/125 [G652.D] OS2 500=9/125 [G655] OS2 7A1=9/125 [G657.A1] OS2 7A2=9/125 [G657.A2] OS2	As noted

CL: BK(Black), OR(Orange), YL(Yellow), GN(Green), AQ(Aqua), RD(Red), BL(Blue)

' * Default value of Fibre Per Tube is "1" as per the ordering information, Follow the ordering guide for any other Specific customized fibre per tube requirement. '

PACKING INFORMATION

Part Number	Packing Length	Packing Mode	N.W (kg)	G.W (kg)	Dimension (mm)
3107-31004FXXCL	2000 x 1	Wooden Drum	140.0	180.0	900 x 400 x 550
3107-31006FXXCL	2000 x 1	Wooden Drum	140.0	180.0	900 x 400 x 550
3107-31008FXXCL	2000 x 1	Wooden Drum	140.0	180.0	900 x 400 x 550
3107-31012FXXCL	2000 x 1	Wooden Drum	140.0	180.0	900 x 400 x 550
3107-31024FXXCL	2000 x 1	Wooden Drum	140.0	180.0	900 x 400 x 550
3107-31036FXXCL	2000 x 1	Wooden Drum	140.0	180.0	900 x 400 x 550
3107-31048FXXCL	2000 x 1	Wooden Drum	208.0	256.0	1000 x 450 x 550
3107-31072FXXCL	2000 x 1	Wooden Drum	208.0	256.0	1000 x 450 x 550
3107-31096FXXCL	2000 x 1	Wooden Drum	276.0	346.0	1050 x 450 x 720
3107-31144FXXCL	2000 x 1	Wooden Drum	450.0	550.0	1300 x 550 x 720
3107-31196FXXCL	2000 x 1	Wooden Drum	280.0	360.0	1050 x 450 x 720

