

WHITE LIGHT ILLUMINATOR



ENI-GSA045-120W

FEATURES

- 36 pcs LED
- 48W Illuminator
- 120 m White Light Illuminator Support
- IP66



SPECIFICATION

MODEL	Model No.	ENI-GSA045-120W
	Type	WHITE LIGHT ILLUMINATOR
GENERAL	Beam Angle	45°
	Beam Distance	White Light 120 m
	Best Distance for LPR	20 ~ 30 m
	Design Lifetime	≥50000 Hrs
	Color	White/Black
	LED	36 pcs LED
	Wavelength	455 nm
	Power Supply	85 ~ 265V AC / 12 ~ 24V DC / 24V AC
	Power Consumption	≤48W
	Working Temperature	-30 °C ~ 50 °C
	Working Humidity	≤90%
	Ingress Protection	IP66
	Surge Protection	Common mode: 6KV, Differential mode: 3KV
	Material	Aluminium Die-Casting Housing
Panel	Tempered glass	
Dimensions	261 x 202 x 90 mm	
Net Weight	2.2 kg	
INSTALLATION	Power	The Power and LED Panel Wires must be Oriented Downward to Prevent Water Intrusion.
	Earthing	Lighting Safety Precautions must be Taken and Power Wires must be Grounded.
	Settings	Gently Modify the Bolt of Brightness, Sensor and Time.
	Installation	Professional Electricians or Quality Technicians Should Install and Adjust.
	Caution	Do Not Open the Case and Remove the Power Supply.


★Product specification and availability are subject to change without notice.

WHITE LIGHT ILLUMINATOR



ENI-GSA045-120W

Dimension Unit : mm

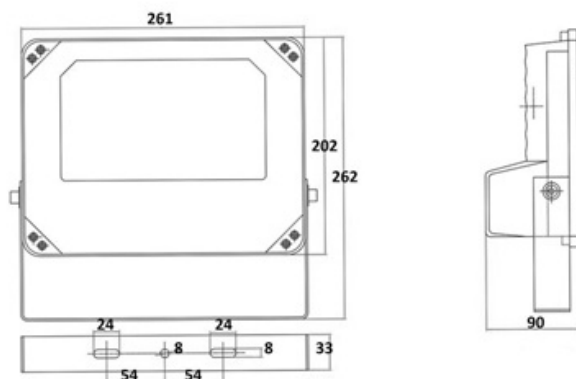

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENI-GSA045-120W	White Light Illuminator with 36 Pieces High Power IR LED, 45° Beam Angle, 120m White Light , IP66 Support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENI-GSA045-120W	Carton Box	2.5	290x220x140

★Product specification and availability are subject to change without notice.