

ALL IN ONE STROBE ILLUMINATOR



ENI-ASA010-025R

FEATURES

24 pcs LED
25 m Intelligent Strobe Support
Low Recycling Time
Peak Power Flash Enhances Number Plate Images
IP66



SPECIFICATION


MODEL	Model No.	ENI-ASA010-025R
	Type	ALL IN ONE STROBE ILLUMINATOR
GENERAL	Beam Angle	10°
	Beam Distance	Intelligent Strobe 25 m
	Best Distance for LPR	16 ~ 25 m
	Flash Trigger Method	Switching Value
	Synchronization Port	Switching Value
	Peak Flash Duration	1/30 ms
	Recycle time	<50ms
	Flash Response Time	≤2ms
	Design Lifetime	≥50000 Hrs
	Color	White
	LED	24 pcs LED
	Wavelength	680 ~ 850 nm
	Cover Range	1 Lane
	Power Supply	200~240V AC /48Hz~52Hz
	Power Consumption	Average Power ≤100W (@1 flash/s), Maximum Power in instant ≤300W For LED Strobe Max. ≤30W (The actual power is related to the control mode) For LED Flash Peak ≤200W (Under infrared mode it can be set ON/OFF or power control)
	Serial Interface	1xRS485
	Heater	Supported (<10°C heater on)
	Working Temperature	-40 °C ~ 80 °C
Working Humidity	5% ~ 90%RH (non-condensing)	
Ingress Protection	IP66	
Surge Protection	Common mode: 4KV, Differential mode: 2KV	
Material	Aluminium Die-Casting Housing	
Panel	Tempered glass	
Dimensions	276 x 420 x 276 mm	
Net Weight	5.3 kg	
INSTALLATION	Power	The Power and LED Panel Wires must be Oriented Downward to Prevent Water Intrusion.
	Earthing	Lighting Safety Precautions must be Taken and Power Wires must be Grounded.
	Settings	Gently Modify the Bolt of Brightness, Sensor and Time.
	Installation	Professional Electricians or Quality Technicians Should Install and Adjust.
	Caution	Do Not Open the Case and Remove the Power Supply.

ALL IN ONE STROBE ILLUMINATOR



ENI-ASA010-025R

Dimension Unit : mm

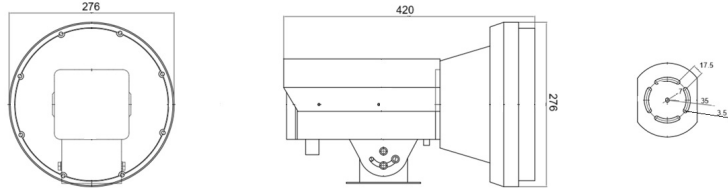

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENI-ASA010-025R	All in One Strobe illuminator with 24 Pieces High Power White LED, 10° Beam Angle, 25 m Intelligent Strobe Support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENI-ISA010-100R	Carton Box	-	-