


4MP BOX CAMERA



ENC-HBL7O-00R-71

FEATURES

- 4MP Resolution
- True WDR
- ONVIF Profile (S, G, T)
- Quad Stream
- Auto Back Focus
- Audio and Alarm Support
- Telnet (L3 support only)
- PoE

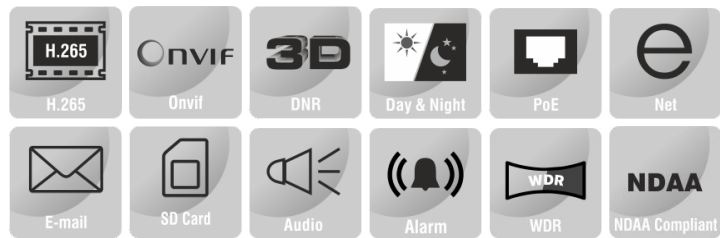

SPECIFICATION

MODEL	Model No.	ENC-HBL7O-00R-71
	Type	4MP BOX CAMERA
CAMERA	Image Sensor	1/1.8" CMOS Progressive 4.0 MegaPixel
	Day / Night	IR Cut Filter with Auto Switch
	Lens Type	CS Mount
	Iris	DC Iris
	Electronic Shutter	1s ~ 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0.002 lux, 0 Lux (External IR LED ON)
	AGC	Auto / Manual
	Digital Zoom	16x
	Digital Noise Reduction	2D & 3D DNR, Auto / Manual
	S/N Ratio	≥55 dB
	Defog	Smart Defog
WDR	120 dB	

★Product specification and availability are subject to change without notice.

4MP BOX CAMERA



ENC-HBL7O-00R-71

MODEL		ENC-HBL7O-00R-71
	Model No.	ENC-HBL7O-00R-71
	Type	4MP BOX CAMERA
VIDEO	Max. Resolution	2592×1520
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (2592×1520) @ 25/30fps, (1920×1080, 1280×720) @ 50/60fps Sub Stream: (1920×1080, 1280×720, 704×576)@ 25/30fps Third Stream: (640×480, 352×288, 320×240, 176×144) @25/30fps Fourth Stream: (640×480, 352×288, 320×240, 176×144) @25/30fps (Optional) **Fourth Stream Support in IE only
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night (Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Daynight, Tungsten, Manual
	Corridor Mode	Supported
	BLC	Supported
	OSD	Up to 8 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes
	ROI	Up to 8 Regions
Privacy Mask	Up to 4 Regions	

★Product specification and availability are subject to change without notice.


4MP BOX CAMERA



ENC-HBL70-00R-71

MODEL	Model No.	ENC-HBL70-00R-71
	Type	4MP BOX CAMERA
AUDIO	Audio Compression	G.711A, G.711U, RAW_PCM
	Audio Bit Rate	64 kbps, 128 kbps
	Audio I/O	1/1
	Built-in Mic	Supported
	Two-Way Communication	Supported
SMART	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Loitering, Multi Loitering, Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Face Detection (Capture), Human & Vehicle Detection (Capture), Abnormal Speed, Wrong Way Detection, Illegal Parking, Signal Bad
	Alarm Management	Motion Detection, Tampering, Input & Output Event, Network Alarm, Disk Alarm, Day / Night Switch Alarm, Abnormal Audio Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot, Scheduled / Manual Alarm
	Alarm Notifications	E-mail (Notification & Snapshot), HTTP (Alarm icon), FTP (Snapshot & Recording), SD Card (Recording)
INTERFACE	Protocols	TCP/IP, UDP, IPv4, ICMP, HTTP, HTTPS, RTCP/RTP, RTSP, DHCP, NTP, PPPoE, SMTP, DNS, DDNS, UPnP, FTP, ARP, IGMP, QoS, 802.1x, SNMP, SSL/TLS 1.2
	Security	TLS Video Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication, HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T), SDK / CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Alarm I/O	1/1
	CVBS Output	Supported
	Edge Storage	SD card slot, up to 512 GB
	ANR	Supported
	Max User Access	32
	Client Application	EyeGuard
GENERAL	Power Supply	12V DC/ 24V AC, PoE (IEEE 802.3af)
	Max. Power Consumption	≤3 W
	Working Temperature	-40 °C ~ 60 °C
	Working Humidity	≤95% RH
	Vandal Resistant	IK10 (Housing)
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	150.2x75x69.7 mm
Net Weight	0.40 kg	

Dimension Unit : mm

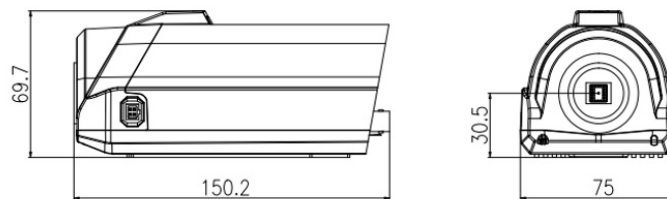

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBL70-00R-71	4MP IP H.265 Box Camera with CS Mount Lens, PoE, SD Card Slot ,WDR and Smart Analytics	1

★Product specification and availability are subject to change without notice.

4MP BOX CAMERA



ENC-HBL7O-00R-71

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBL7O-00R-71	Carton Box	-	-