

4" WALL MOUNT SPEAKER WITH FIRE DOME, 20W

WALL MOUNT SPEAKER



DESCRIPTION

The NVS-EN20WS is an EN54-24 certified public address speaker for background music and paging in schools, offices, hotels, and airports. It features a two-way 4" woofer and 1" silk tweeter with selectable outputs of 20W, 10W, 5W, and 2.5W at 8Ω, ensuring clear audio performance. Built with a fire-resistant ABS enclosure, metal grille, Phoenix terminal, thermal fuse, and 95°C fire-rated cable, it provides safety and reliability, while the stainless-steel bracket enables fast, secure installation.


FEATURES

- ◉ EN54-24 Certified
- ◉ 4" woofer + 1" silk tweeter for clear audio
- ◉ Fire-resistant ABS enclosure & metal grille
- ◉ Phoenix terminal, thermal fuse, 95°C cable
- ◉ Quick installation with stainless steel bracket


Specifications	
Model	NVS-EN20WS
Rated Power	20W
Power Taps	20W, 10W, 5W, 2.5W & 8Ω
Input	100V or 70V & 8Ω
Frequency Range	100Hz - 20kHz
Sensitivity	88±3dB
Max SPL	101dB±3dB
Coverage Angle	110° H × 55° V
IP Rating	IP55
Driver	4" woofer and 1" silk tweeter
Dimension	245×170×140mm
Weight	2.5kg

4" WALL MOUNT SPEAKER WITH FIRE DOME, 20W


FREQ.RESPONSE
(dB SPL,1W,1m)

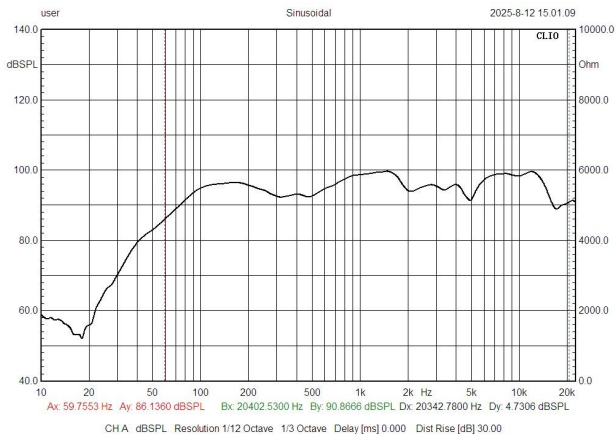

IMPEDANCE

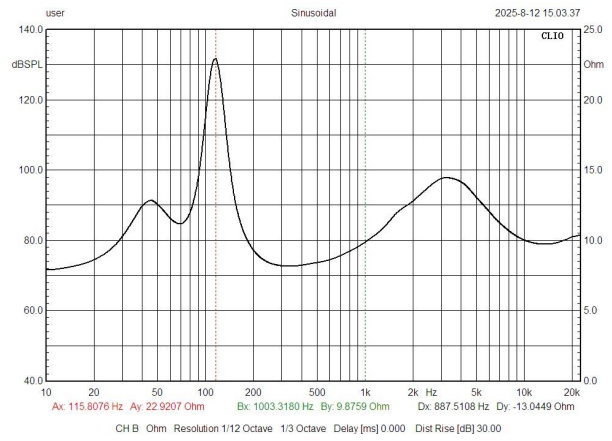

DIMENSION

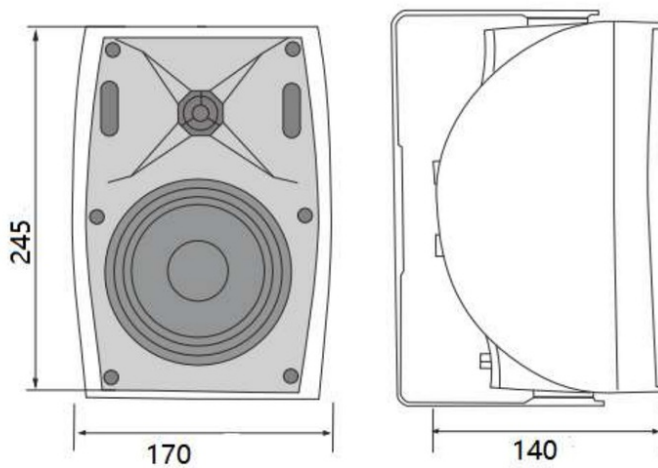

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-EN20WS	4" WALL MOUNT SPEAKER WITH FIRE DOME, 20W	01

ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01