

PENDANT SPEAKER ,30W (WHITE)

PENDANT SPEAKER



DESCRIPTION

The NVS-EN30PS-L is an EN54-24 certified 30W Pendant loudspeaker engineered for voice alarm systems, ensuring compliance with stringent safety standards. Designed for versatile operation, it supports both 100V line distribution and 8 Ohm impedance, making it suitable for varied installation requirements. Featuring a robust Euro Phoenix connector, the loudspeaker facilitates secure and reliable connections in critical applications. With high sound pressure levels and optimized frequency response, it ensures exceptional speech intelligibility for paging systems and delivers balanced audio quality for background music (BGM) applications. Its durable construction and acoustic performance make it ideal for integration into public address and voice alarm systems.


FEATURES

- EN54-24 Certified
- 5.25" PP full-range woofer
- IP44 rated, indoor/outdoor use
- UV & fire-resistant ABS cabinet
- 95°C fire-resistant cable & thermal fuse
- Pendant design for uniform sound dispersion
- Safety hanging wire for secure mounting


| Specifications | |
|----------------------------|--|
| Model | NVS-EN30PS-L |
| Rated Power | 30W |
| Driver Unit | 5.25" woofer and 1" tweeter 2-way speaker system |
| Material | UV-fire resistant ABS enclosure |
| Frequency Response | 65Hz-20KHz |
| Sensitivity(1m,1w) | 90dB±3dB |
| Maximum SPL (1m) | 104dB±3dB |
| Coverage Angle | 100° |
| Input Voltage/Impedance | 100V, 8Ω |
| Power Rating Options @100V | 30/15/7.5/3.8W |
| Input Connector | Fireproof phoenix connector |
| Color | White |
| Dimension | Ø 195×250mm |
| Weight | 2.4kg |

PENDANT SPEAKER ,30W (WHITE)


FREQ. RESPONSE
(dB SPL,1W,1m)

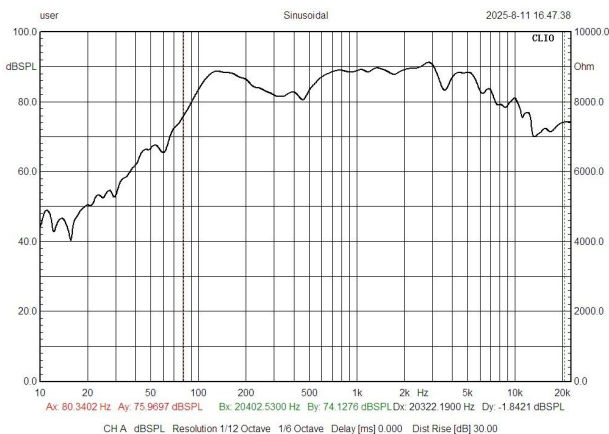

IMPEDANCE

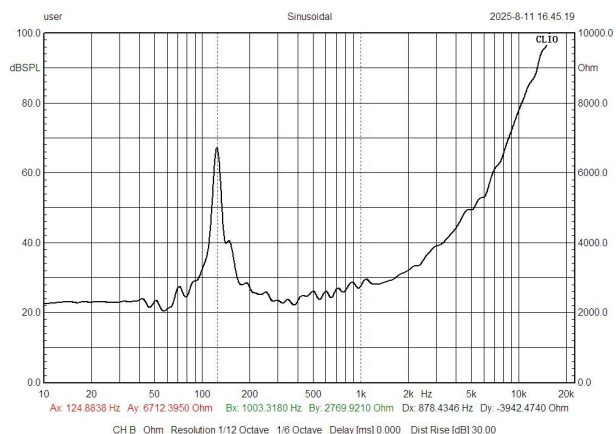

DIMENSION

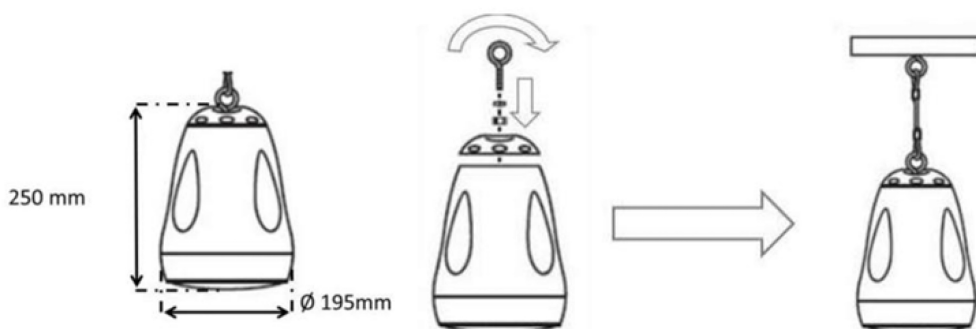

ORDERING INFORMATION

| Part Number | Description | Standard Quantity |
|--------------|------------------------------|-------------------|
| NVS-EN30PS-L | PENDANT SPEAKER ,30W (WHITE) | 01 |

ACCESSORIES INFORMATION

| Description | Standard Quantity |
|-------------|-------------------|
| User Manual | 01 |