

2-WAY OUTDOOR WALL MOUNT LOUDSPEAKER,40W(WHITE)

WALL MOUNT SPEAKER



DESCRIPTION

The NVS-EN40WS-L is an EN54-24 certified outdoor weather-proof wall-mounted commercial public address speaker designed for background music and paging systems in various settings such as schools, offices, hotels, and airports. It features a 100V/70V transformer with power tapping of 40W, 20W, 10W, and 5W, as well as an 8Ω bypass. The speaker system includes a 4.5" polypropylene woofer and a 0.75" silk tweeter for high-quality sound. With an IP66 water-resistant rating and anti-rust metal mesh grille, it is built to withstand outdoor environments. The UV-protected ABS enclosure ensures durability, while the 180-degree rotatable mounting bracket allows for easy installation.


FEATURES

- ◉ EN54-24 Certified
- ◉ 4.5" polypropylene woofer + 0.75" silk tweeter
- ◉ UV-protected ABS, Rust-proof grille
- ◉ 180° mounting bracket for easy installation


Specifications	
Model	NVS-EN40WS-L
Rated Power	40W
Power Taps	40W, 20W, 10W, 5W
Input	100V/70V & 8Ω
Frequency Range	90Hz to 18kHz
Sensitivity	92±3dB
Max SPL	108dB±3dB
Coverage Angle	110° H ×55° V
Speaker Unit	4.5" polypropylene woofer and 0.75" silk tweeter
IP Rating	IP66
Dimension	240×190×145mm
Weight	2.2kg

2-WAY OUTDOOR WALL MOUNT LOUDSPEAKER,40W(WHITE)

FREQ.RESPONSE
(dB SPL,1W,1m)

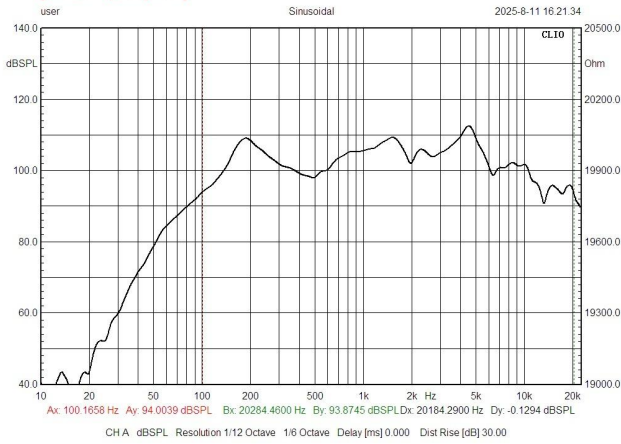

IMPEDANCE

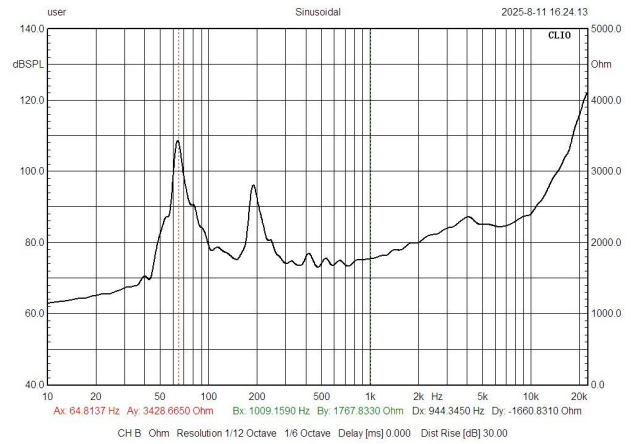

ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-EN40WS-L	2-WAY OUTDOOR WALL MOUNT LOUDSPEAKER,40W(WHITE)	01

ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01