


6 WAY PDU WITH C13 SOCKET & UK PLUG

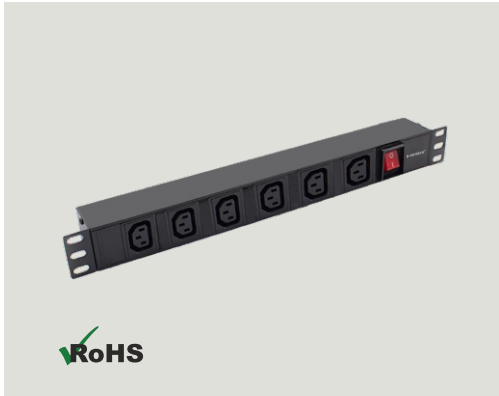

NORDEN Power Distribution Units are designed and manufactured in a modularized way exclusively for cabinets. The product is equipped with supply socket modules meeting different systems and standards in the world. The series products can be produced accordingly to customers' special requirements.

*Picture for reference only

COMPLIANCE

EMC & safety: -EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3, FCC Part 15 Class A, ICES-003, PSE, VCCI Class A, VDE
 Environmental: RoHS, REACH: Contains No SVHCs
 Socket/Outlet Standard: IEC C13

DESIGN & MATERIALS


Material of Construction	PC/ABS alloy, High Impact flame retardant thermoplastic -UL94-V0
Shell Material & Colour	Aluminium, black
Socket Type	IEC320 C13 Socket
Outlet Qty.	6 Way
Plug Type	BS1363(UK) 13A plug
Power Input Style	Right-end single input style
Bracket Installation Style	Frontal Installation Style
Control Function	Switch
Commando Plug Protection	IP44
Lead Length	2m
Lead Specification	3 x 1.5 mm ² x 2M

ELECTRICAL & ENVIRONMENTAL DATA

Current Rating	13A 250VAC
Maximum load current available in	13A
Input frequency	50 or 60 Hz
Maximum load capacity	3750W
Operating Environment	-5 °C to +45 °C
Operating Relative Humidity	5 – 95 %
Operating Elevation	0-3000 meters
Storage Temperature	-25°C to +65 °C
Storage Elevation	0-15000 meters

6 WAY PDU WITH C13 SOCKET & UK PLUG

DRAWING

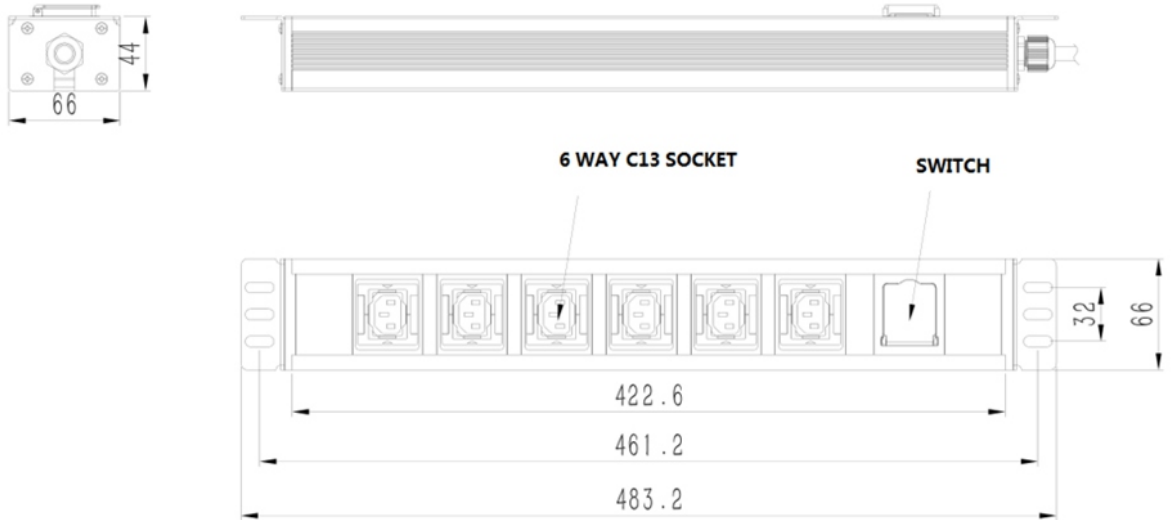

ORDERING INFORMATION

Part Number	Description
1332-106A06N004X	06 Way 13Amp PDU with C13 Socket & UK Plug ,2mtr Cable Length