


5MP MOTORIZED LPR BULLET CAMERA



ENC-HBU8M-70R-75

FEATURES

- Advanced AI LPR Algorithm
- 8 ~ 32 mm Motorized Lens
- Smart IR up to 70 m
- ONVIF Profile (S, G, T, M)
- Triple Stream
- Built-in Mic and Speaker
- PoE, IP67

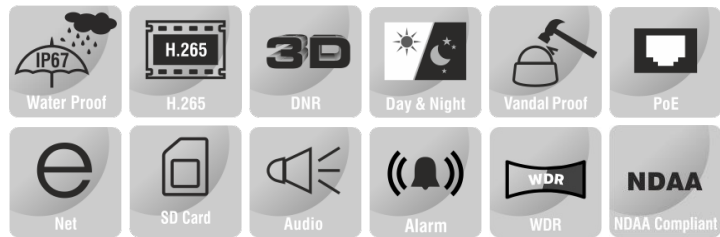

SPECIFICATION

MODEL		Model No.	ENC-HBU8M-70R-75
CAMERA	Type	5MP MOTORIZED LPR BULLET CAMERA	
	Image Sensor	1/1.8" CMOS Progressive 5.0 MegaPixel	
	Day / Night	IR Cut Filter with Auto Switch	
	Lens Type	Motorized	
	Focus	Auto / Manual	
	Iris	Fixed Auto Iris	
	Focal Length	8 ~ 32 mm Lens	
	Angle of View (H)	42.0° ~ 15.0°	
	Angle of View (V)	23.0° ~ 8.0°	
	Angle of View (D)	44.5° ~ 17.0°	
	Angle Adjustment	Bracket; Pan 0~360°, Tilt 0~90°, Rotate 0~360°	
	Aperture	F1.6	
	Electronic Shutter	1s ~ 1/100,000s, Auto / Manual	
	Min. Illumination	Color: 0.001 lux @ F1.6, B/W: 0 lux with IR	
	AGC	Auto / Manual	
Digital Noise Reduction	2D & 3D DNR		
S/N Ratio	≥55 dB		
Defog	Smart Defog		
WDR	120 dB		
Smart IR	Up to 70 m		
Wavelength	850 nm		

★Product specification and availability are subject to change without notice.

5MP MOTORIZED LPR BULLET CAMERA



ENC-HBU8M-70R-75

MODEL	Model No.	ENC-HBU8M-70R-75
	Type	5MP MOTORIZED LPR BULLET CAMERA
VIDEO	Max. Resolution	2592x1944
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (2592x1944 , 2592x1520, 1920x1080, 1280x720) @ 50/60fps Sub Stream: (704x576, 640x480, 352x288) @ 25/30fps Third Stream: (640x480, 352x288, 320x240) @ 25/30fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	EIS	Supported
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night (Color, Mono, Auto), Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Day/Night, Tungsten, Fluorescent, Shadow, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Up to 8 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes, Image overlay
ROI	Up to 8 regions	
Privacy Mask	Up to 4 regions	
AUDIO	Audio Compression	G.711 U, G.711A, , RAW_PCM
	Audio Bit Rate	64 kbps, 128 kbps
	Audio I/O	1/1
	Built-in Mic	Supported
SMART	Max. Vehicle Speed	100 km/h
	Identification	Vehicle Brand, Type & Color, Number Plate Color
	White / Black List	Supported (up to 1000 records in the camera)
INTERFACE	Smart Search	LPR Smart Search
	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, IGMP, 802.1X, Multicast, SNMP
	Security	AES 128/256 Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T, M), SDK / CGI
	Network	1 x RJ45 10M/100M Self Adaptive Ethernet Port
	Built-in Speaker	Supported
	Alarm Interface	1 / 2
	Serial Interface	1 x RS485
	Edge Storage	Micro SD Card Slot, up to 1TB
	ANR	Supported
	Max. User	32
GENERAL	Client Application	EyeGuard
	Power Supply	12V DC , PoE (IEEE 802.3af)
	Max. Power Consumption	≤12 W
	Working Temperature	-40 °C ~ 65 °C
	Working Humidity	≤95% RH
	Ingress Protection	IP67
	Vandal Resistant	IK10
	Surge Protection	TVS4000V
	Reset Button	Supported
	Compatible NVR Models	ENR-04032-N-FRK , ENR-02008-N-EPK, ENR-08064-N-FRK, ENR-04064-N-FRK, ENR-02016-N-FK, ENR-08064-N-FDK
	Dimensions	Φ110x356.3 mm
Net Weight	1.5 kg	


★Product specification and availability are subject to change without notice.

5MP MOTORIZED LPR BULLET CAMERA



ENC-HBU8M-70R-75

Dimension Unit : mm

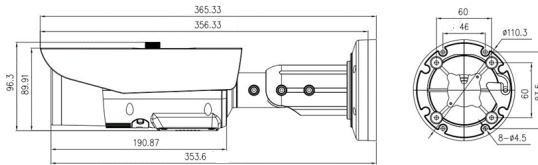

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU8M-70R-75	5MP 60FPS Lowlight IR IP H.265 LPR Bullet camera with 8 to 32mm Motorized Lens, PoE, SD card slot, WDR, Smart Analytics and 70M IR support	1
ENB-BCUJ66	Junction Box for Norden Bullet Camera	1
ENB-BCUV67	Pole Mount Bracket for Norden Bullet Camera	1
ENB-BCUH67	Corner Mount Bracket for Norden Bullet Camera	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBU8M-70R-75	Carton Box	-	-