

EXPLOSION PROOF HOUSING FOR BOX CAMERA



ENH-BZC6800R

FEATURES


Air Cooling Camera Housing
Stainless Steel 304/316L
Temperate Resist up to 150°C
IP68



SPECIFICATION

MODEL	Model No.	ENH-BZC6800R
	Type	EXPLOSION PROOF HOUSING FOR BOX CAMERA
GENERAL	Material	304/316L Stainless Steel Construction
	Cooling Mode	Compressed Air
	Temperate Resist	-25 to +150°C
	Cooling Media	Air Flow: 0.3 ~ 0.6m ³ /min, Temperature: ≤35°C Pressure: 0.1 ~ 0.2 MPa
	Cable Thread Hole	2pcs G3/4 or NPT3/4
	Power Supply	100V ~ 240V AC / 24V DC or 24V AC
	Power Consumption	≤15W
	Ambient Pressure	80 kPa ~ 106 kPa
	Ingress Protection	IP68
	Relative Humidity	≤95% (no condensation)
	Dimension	374x163x185 mm (Outer) 260x75x75 mm (Inner)
	Mount	Wall/Pole
	Weight	9.1 Kg

Dimension Unit : mm

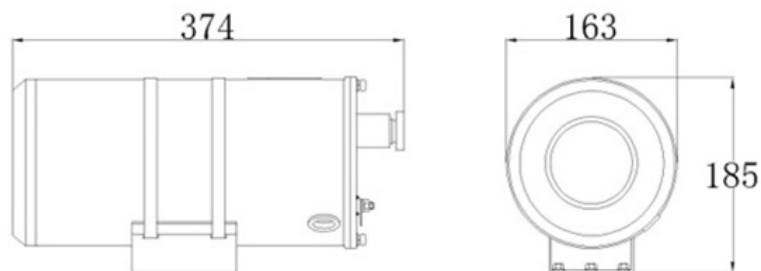

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENH-BZC6800R	Explosion Proof Air Cooling Type Housing for Norden Box Camera with IP68 Rating (with Wall Mount Bracket)	1

★Product specification and availability are subject to change without notice.

EXPLOSION PROOF HOUSING FOR BOX CAMERA



ENH-BZC6800R

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENH-BZC6800R	Carton Box	10	420x200x230