


CATEGORY 5E UTP PATCH PANEL 48 PORT

NORDEN's high-density Category 5E patch panel offers 48 ports in a compact 1U design, optimized for space-efficient installations. It features color-coded labeling for both TIA/EIA 568A and 568B wiring schemes, ensuring easy and accurate termination. Engineered for durability and ease of use, the panel helps reduce installation time and long-term maintenance costs. Each unit is supplied with a cable manager, mounting screws, and cable ties for a complete, installer-friendly solution.

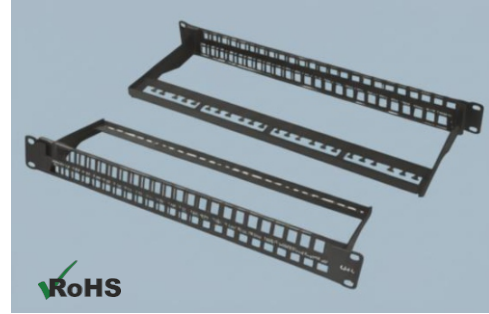

COMPLIANCE

IEEE 802.af, IEEE 802.3at for PoE applications.
ISO/IEC 11801 Class E, TIA/EIA-568B.2-1

DESIGN & MATERIALS

Panel Type	Flat
Panel Width	482 mm
Panel Height	44.1 mm
Outlet Style	Unkeyed RJ-45
No. of Outlets	48
Panel Material	SPCC (Steel Plate Cold Rolled Commercial)
Material Thickness	1.5 mm
Connector Module Holder	High Impact, Flame-Retardant Plastic Compound, UL 94 V-0
Cover Colour	Black

STANDARDS

Wiring Standards	EIA/TIA 568 A/B
Flammability Rating	UL 94V-0
Transmission	ISO/IEC 11801:2002 ANSI /TIA/EIA-568.B.2-10

DRAWING

