

# ALUMINIUM HOUSING FOR BOX CAMERA



## ENH-BSA66X0R

### FEATURES


- Weather Protection for Camera and Lens
- Simple and Adaptable Installation
- Sunshade Support
- IP66



### SPECIFICATION

MODEL	Model No.	ENH-BSA66X0R
	Type	ALUMINIUM HOUSING FOR BOX CAMERA
GENERAL	Material	Aluminium Alloy
	Color	White
	Beam angle	45°
	IR Distance	Up to 100 m
	Wavelength	850 nm
	Built-in Fan	Supported
	Built-in Heater	Supported (Optional)
	Power Supply	110 ~ 220V AC
	Max. Power Consumption	≤25W
	Working Condition of Temperature Control Module	Heater on: ≤10°C, Fan on: ≥50°C Heater off: >10°C, Fan off: <50°C
	Ingress Protection	IP66
	Working Humidity	10 ~ 90%
	Working Temperature	-40°C ~ 60°C (-50°C ~ 60°C With Heater)
Vandal Resistant	IK10 (Optional)	
Dimensions	445 × 190 × 132 mm	
Weight	3.3 Kg	

Dimension Unit : mm

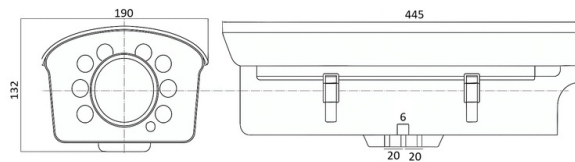

# ALUMINIUM HOUSING FOR BOX CAMERA



## ENH-BSA66X0R

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENH-BSA66X0R	Aluminium Housing for Norden Box Camera with IP66 Rating, Wall Mount Bracket with Cable Mangement and 100 meter IR Support	1
ENH-BSA66X0R (With Heater)	Aluminium Housing for Norden Box Camera with IP66 Rating, Heater, Wall Mount Bracket with Cable Mangement and 100 meter IR Support	1
ENH-BSA66X0R (With IK10)	Aluminium Housing for Norden Box Camera with IP66 Rating, IK10, Wall Mount Bracket with Cable Mangement and 100 meter IR Support	1
ENH-BSA66X0R (With Heater and IK10)	Aluminium Housing for Norden Box Camera with IP66 Rating, IK10, Heater, Wall Mount Bracket with Cable Mangement and 100 meter IR Support	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENH-BSA66X0R	Carton Box	3.8 Kg	490x185x235