

# 5MP FIXED COMPACT DOME CAMERA



## ENV-HCD8F-15R-65 (M12 Connector)

### FEATURES

2.8 mm Fixed Lens
Smart IR up to 15 m
ONVIF Profile (S, G, T, M)
Triple Stream
Built-in Mic



### SPECIFICATION

MODEL	Model No.	ENV-HCD8F-15R-65 (M12 Connector)
	Type	5MP FIXED COMPACT DOME CAMERA
CAMERA	Image Sensor	1/2.8" CMOS Progressive 5.0 MegaPixel
	Day/Night	IR Cut Filter with Auto Switch
	Lens Type	Fixed
	Focal Length	2.8 mm
	Focus	Fixed
	Iris Type	Fixed Iris
	Digital Zoom	16x
	Angle of View (H)	93.4°
	Angle of View (V)	69.1°
	Angle of View (D)	116.1°
	Angle Adjustment	Pan ± 45°, Tilt 0~72°, Rotate 0~360°
	Aperture	F2.0
	Electronic Shutter	1s to 1/100,000s, Auto / Manual
	Min. Illumination	Color: 0.001 lux @ F2.0, B/W: 0 lux with IR
	AGC	Auto / Manual
	Digital Noise Reduction	2D & 3D DNR, Auto / Manual
S/N Ratio	≥55 dB	
Defog	Smart Defog	
WDR	120 dB	
Smart IR	Up to 15 m	
Wavelength	850 nm	

★Product specification and availability are subject to change without notice.

# 5MP FIXED COMPACT DOME CAMERA



## ENV-HCD8F-15R-65 (M12 Connector)

<b>MODEL</b>	<b>Model No.</b>	<b>ENV-HCD8F-15R-65 (M12 Connector)</b>
	Type	5MP FIXED COMPACT DOME CAMERA
<b>DORI</b>	Lens	2.8 mm
	Detection	68.0 m
	Observation	27.2 m
	Recognition	13.6 m
	Identification	6.8 m
<b>VIDEO</b>	Max. Resolution	2592x1944
	Video Compression	Enhanced (H.265, H.264), H.265, H.264, MJPEG
	Frame Rate	Main Stream: (2592x1944, 2592x1520, 1920x1080, 1280x720) @ 25/30fps Sub Stream: (704x576, 640x480, 352x288) @ 25/30fps Third Stream: (640x480, 352x288, 320x240) @ 25/30fps
	Stream Settings	i-Frame, PAL/NTSC, Frame Rate
	Video Bit Rate	100 kbps ~ 12 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation, Sharpness, Day/Night, Flip/Mirror/Rotation, Multiple Scene & Profile
	White Balance	Auto, Day/Night, Tungsten, Fluorescent, Shadow, Manual
	Corridor Mode	Supported
	HLC	Supported
	BLC	Supported
	OSD	Up to 8 regions
	OSD Type	Title, Week, Date, Time, Text with different colors and adaptable sizes, Image overlay
	ROI	Up to 8 regions
	Privacy Mask	Up to 4 regions
<b>AUDIO</b>	Audio Compression	G.711A, G.711U, RAW_PCM
	Audio Bit Rate	64 kbps, 128 kbps
	Built-in Mic	Supported
<b>SMART</b>	Behavior Detection	Intrusion (Perimeter), Crossline (Tripwire), Double Crossline (Double Tripwire)
	Intelligent Identification	Multi Loitering, Abandoned Object (Object Left), Missing Object (Object Lost)
	Statistical Analysis	Face Detection, People Counting, Human & Vehicle Detection, Wrong Way Detection
	Alarm Management	Motion Detection, Tampering, Disk Alarm, Day Night Switch Alarm, Pre/Post Alarm Recording, Alarm Recording/Snapshot
	Alarm Notifications	E-mail (Notification & Snapshot), HTTP (Alarm icon), FTP (Snapshot & Recording), SD Card (Recording)
<b>INTERFACE</b>	Protocols	TCP/IP, UDP, IPv4, IPv6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, RTP/RTSP/RTCP, PPPoE, NTP, UPnP, SMTP, 802.1X, Unicast, ARP, SNMP, SL/TLS1.2
	Security	AES 128/256 Encryption, IP Filter, User Authentication (Multiple Privilege Level), 802.1X Authentication (EAP-MD5), HTTPS Authentication, RTSP Authentication, Digest Authentication, User Access Log
	Compatibility	ONVIF Profile (S, G, T, M), SDK/CGI
	M12 Connector	Supported
	Edge Storage	Micro SD Card Slot, up to 512 GB
	ANR	Supported
	Max User	32
Client Application	EyeGuard	
<b>GENERAL</b>	Power Supply	12V DC
	Max. Power Consumption	≤5 W
	Working Temperature	-40 °C ~ 65°C
	Working Humidity	≤95% RH (non-condensing)
	Ingress Protection	IP67
	Surge Protection	TVS4000V
	Reset Button	Supported
	Dimensions	99.6x99.6x63.3 mm
Net Weight	0.38 Kg	


★Product specification and availability are subject to change without notice.

# 5MP FIXED COMPACT DOME CAMERA



## ENV-HCD8F-15R-65 (M12 Connector)

Dimension Unit : mm

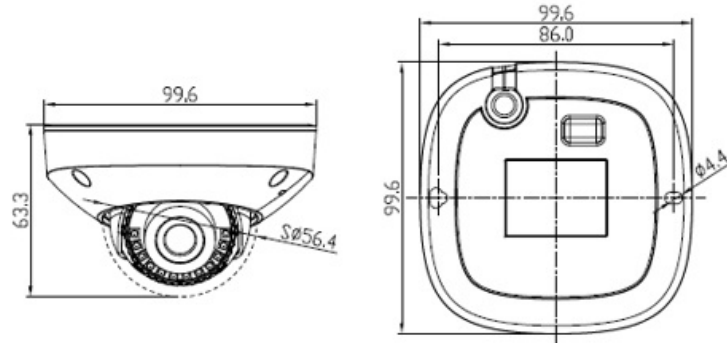

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENV-HCD8F-15R-65 (M12 Connector)	5MP H.265 IR IP Compact Dome Camera with 2.8mm Lens, WDR, SD Card Slot, Built-in Mic, Smart Analytics and 15m IR Support	1
ENB-BCDJ65	Junction Box for Norden Dome Camera	1
ENB-BCDQ65	Pendent Cap for Norden Dome Camera	1
ENB-BCDP66	Pendent Mount for Norden Dome Camera	1
ENB-BCDV66	Pole Mount Bracket for Norden Dome Camera	1
ENB-BCPH65	Corner Mount Bracket for Norden Dome Camera	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENV-HCD8F-15R-65 (M12 Connector)	Carton Box	-	-