

# 2x5MP MULTI SENSOR GLOBAL SHUTTER



## ENC-HBU8D-60R-78

### FEATURES

2/3" Global Shutter

Built-in High-Accuracy GPS Module

SD Card Slot Support up to 1TB

ONVIF Profile (S, G, T)



### SPECIFICATION

<b>MODEL</b>	<b>Model No.</b>	<b>ENC-HBU8D-60R-78</b>
	Type	2x5MP MULTI SENSOR GLOBAL SHUTTER
<b>CAMERA</b>	Image Sensor	2/3" Global Shutter
	Day / Night	IR Cut Filter with Auto Switch
	Focal Length	15 ~ 50 mm
	Angle of View (H)	41.4° ~ 10.3°
	Angle of View (V)	26.8° ~ 8.4°
	Angle of View (D)	32.0° ~ 13.3°
	Aperture	F1.4
	Electronic Shutter	30us ~ 40000us
	Min. Illumination	Color: 0.001 lux @ F1.4, B/W: 0 lux IR on
	Smart IR	Up to 60 m
Wavelength	850 nm (Optional 740 nm)	
<b>VIDEO</b>	Max. Resolution	2464x2056
	Video Compression	H.265, H.264, MJPEG
	Frame Rate	2464x2056 @ 30fps
	Stream Settings	i-Frame, NTSC
	Video Bit Rate	16 kbps ~ 16 Mbps
	Bitrate Type	CBR, VBR
	Image Settings	Brightness, Contrast, Saturation
	Privacy Mask	Up to 8 Regions
<b>SMART</b>	Road Traffic Control	Red Light Running, Cross Line at Red Light, Minimum Red Time for Valid violation, Reverse Driving, Vehicle Attributes Event Detection
	Max. Vehicle Speed	Up to 250 km/h
	Accuracy	Capture Rate : Up to 99% Recognition : Up to 98%
	Coverage	2 ~ 3 lanes
	Identification	Vehicle Type & Color, License Plate Color, No License Plate Vehicle Capture, Speed & Direction Detection of Vehicle
	White / Black List	Supported (up to 20,000 records in the camera)
	LPR Smart Search	Supported

★Product specification and availability are subject to change without notice.


# 2x5MP MULTI SENSOR GLOBAL SHUTTER



## ENC-HBU8D-60R-78

MODEL	Model No.	ENC-HBU8D-60R-78
	Type	2x5MP MULTI SENSOR GLOBAL SHUTTER
INTERFACE	Protocols	TCP/IP, HTTP, MQTT
	Compatibility	ONVIF Profile (S, G, T), API
	Network	1 x RJ45 10M/100M/1000M Self Adaptive Ethernet Port
	Alarm I/O	4/3
	Serial Interface	1xRS485
	GPS	Supported
	4G	Supported (Optional)
	Edge Storage	Micro SD Card Slot, up to 1TB
GENERAL	Power Supply	24V AC/DC, PoE (IEEE 802.3af)
	Max. Power Consumption	≤26W
	Working Temperature	-40 °C ~ 70 °C
	Working Humidity	≤95% RH
	Casing	Metal
	Ingress Protection	IP67 (Housing)
	Dimensions	121x 295 x 245 mm
	Net Weight	4.3 kg

Dimension Unit : mm

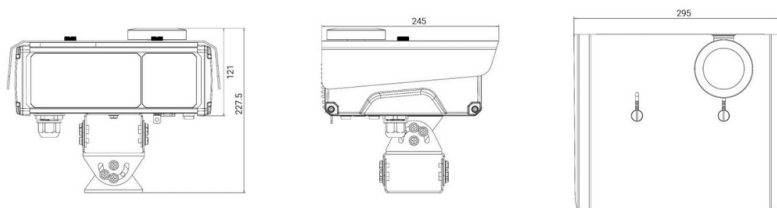

### ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENC-HBU8D-60R-78 (With 4G)	2x5MP IR IP H.265 Multi Sensor Global Shutter Camera with 15~50mm Motorized Lens, 4G, SD Card Slot and 60 m IR Support	1
ENC-HBU8D-60R-78 (Without 4G)	2x5MP IR IP H.265 Multi Sensor Global Shutter Camera with 15~50mm Motorized Lens, SD Card Slot and 60 m IR Support	1
ENC-HBU8D-60R-78 (With 4G and 740 nm Wavelength)	2x5MP IR IP H.265 Multi Sensor Global Shutter Camera with 15~50mm Motorized Lens, 4G, SD Card Slot and 60 m IR Support	1
ENC-HBU8D-60R-78 (Without 4G and 740 nm Wavelength)	2x5MP IR IP H.265 Multi Sensor Global Shutter Camera with 15~50mm Motorized Lens, SD Card Slot and 60 m IR Support	1

### PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENC-HBU8D-60R-78	Carton Box	-	-

★Product specification and availability are subject to change without notice.