


0.50 SQ.MM MULTI CONDUCTOR CONTROL CABLE

The Flexible Control Cables from Norden are used in Office Equipment, Electronic Control Systems, Power Stations, Air-Condition Systems, engineering projects for control, vision and measurement purposes. They are very flexible due to the use of thin multicore copper as conductor. They can be used in wet or dry Internal applications but must be used in duct for external application.

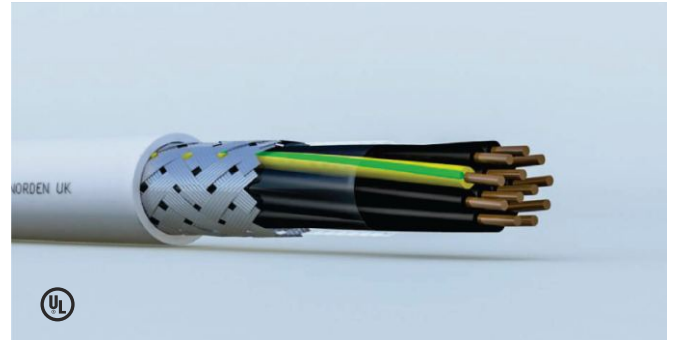

UL File No : E318213

CABLE CONSTRUCTION

Conductor

Solid Bare Copper (Class 5 according to BS EN 60228:2005)

Conductor Size

0.50 mm²

Standard Packing Mode

Cutof Length/ Wooden Reel

Insulation

Flame Retardant PVC

Sheath Color

Grey (standard)

Core Identification

Black with white numbers (3 cores and above to includes Green/Yellow)

Sheath

PVC (Polyvinyl Chloride) or LSZH (Low Smoke Zero Halogen)

ELECTRICAL CHARACTERISTICS

Max. Resistance of Conductor @ 20°C	Ω/km	39.0
Current Rating @ 30C	Amp	7

▷ Standard Reference

BS6500, VDE 0250

▷ Flame Retardant

IEC/EN 60332-1

▷ Voltage Rating

300/500 V

▷ Operating Temperature Range

-20C to +70C

▷ Min. Bend Radius

10 x Overall Diameter

0.50 SQ.MM MULTI CONDUCTOR CONTROL CABLE

ORDERING INFORMATION

▷ YY Series: PVC Insulated/PVC Sheathed Control Cable

Part Number	No. of core x Nom. Cross Sectional Area (n x mm ²)	No. of Strand x Nom. Diameter (n x mm)	Outer Diameter (mm)	Weight (kg/km)
84-10051302X	2 x 0.50	16 x 0.20	4.7	32
84-10051303X	3 x 0.50	16 x 0.20	5.1	39
84-10051304X	4 x 0.50	16 x 0.20	6.3	61
84-10051306X	6 x 0.50	16 x 0.20	7.0	81
84-10051307X	7 x 0.50	16 x 0.20	7.5	95
84-10051312X	12 x 0.50	16 x 0.20	8.6	110

X → BK:Black BL:Blue GN:Green GY:Gray RD:Red WH:White TP:Transparent