


2 Core 14 AWG Shielded Multi Conductor Cable

The Shielded Multi Conductor Cable from NORDEN is suitable to use within Audio, Control and Instrumentation purpose. The cable is constructed with PE Insulation, 100% Aluminium Foil - Polyester Tape Shielded and PVC or LSZH outer jacket.

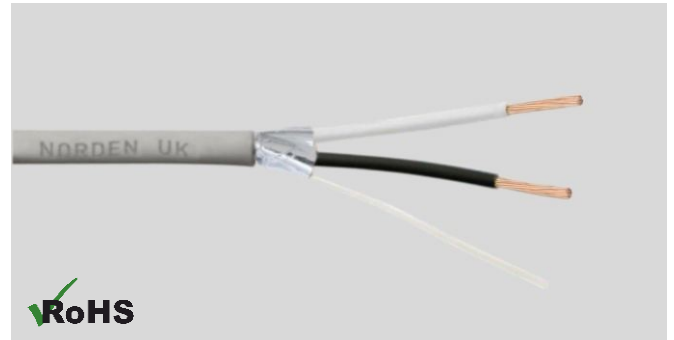

CABLE CONSTRUCTION

Conductor Bare Copper	Shielding 100% Aluminium Foil - Polyester Tape	Rip code Yes	Jacket Color Grey
Insulation PE (High Density Polyethylene)	Drain Wire Tinned Copper	Outer Jacket PVC (Polyvinyl Chloride)/LSZH/PE	

PHYSICAL CHARACTERISTICS


Characteristic	Value
No. of Conductor	2
Conductor Size	14 AWG 19 x 27
Insulation Diameter	2.36 mm
Drain Wire Size	22 AWG 7 x 30
Jacket Thickness	0.43 mm
Jacket Diameter	5.70 mm
Max. Recommended Pulling Tension	557 N
Min. Bending Radius Minor Axis	45.6 mm
Operating Temperature	-10°C to +60°C

ELECTRICAL CHARACTERISTICS

Characteristic	Unit	Value
Nom. Conductor DCR	Ω/km	8.5
Dielectric Strength between Pairs	KV/5min	1.5
Max. Operating Voltage UL	V rms	300

MECHANICAL CHARACTERISTICS

Characteristic	Value
Test Material	PVC/LSZH/PE
Before Tensile Strength (Mpa)	≥ 13.8
Aging Elongation (%)	≥ 100
After Tensile Strength (Mpa)	≥ 10.35
Aging Elongation (%)	≥ 75
Cold Bend (-20±°C x 4 hrs)	No Crack

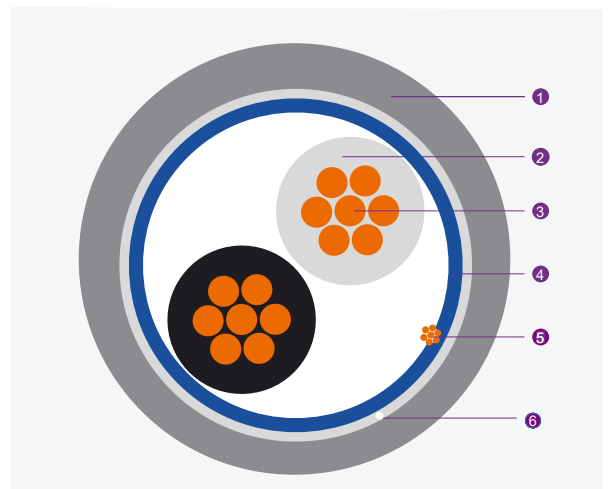

1	2	3	4	5	6
Outer Jacket	Insulation	Center Conductor	Foil Shield	Drain Wire	Rip Code

2 Core 14 AWG Shielded Multi Conductor Cable

INSULATION COLOUR CODE

Individual Core	Colour
Core 1	Black
Core 2	White

ORDERING INFORMATION

Part Number	Description	Net Weight (Kg/Km)
71-3202141	2 Core 14 AWG Shielded Multi Conductor Cable PVC, 305m	68.2
71-3202142	2 Core 14 AWG Shielded Multi Conductor Cable LSZH, 305m	71.6
71-3202144	2 Core 14 AWG Shielded Multi Conductor Cable PE, 305m	74.8