

# COMPACT RACK MOUNTABLE CD PLAYER WITH USB/FM/BLUETOOTH



## DESCRIPTION

The NVS-40020111PL is a multifunctional audio player featuring CD, USB, SD, Bluetooth, and high-sensitivity AM/FM radio playback. It offers full light-touch button control and a high-brightness blue LCD for clear status display. The device supports one-way mixed audio output combining Bluetooth, radio, and CD/MP3 signals, along with individual outputs for Bluetooth, radio, and CD/MP3. This flexible output configuration ensures compatibility with diverse audio application scenarios.

## FEATURES

- ◉ Light-touch controls with bright blue LCD
- ◉ USB, SD, CD tray with MP3 playback
- ◉ High-end CD suction mechanism
- ◉ Bluetooth-enabled
- ◉ Plays CD/MP3/MP4/VCD/DVD formats
- ◉ Built-in AM/FM digital radio (40 presets each)
- ◉ Auto station scan & power-off memory


## Specifications

Model	NVS-40020111PL	
Laser Player	Maximum output voltage 1KHz -10dB signal	1000±100mV
	Frequency response range	20-19KHz(±1dB)
	THD	≤0.3%
	Noise	≤0.02mv
USB	Maximum output voltage	1000±100mV
	Frequency response range	20-19KHz(±1dB)
	THD	≤0.3%
	Noise	≤0.02mv
SD	Maximum output voltage	1000±100mV
	Frequency response range	20-19KHz(±1dB)
	THD	≤0.3%
	Noise	≤0.02mv
Bluetooth	Maximum output voltage 1KHz -10dB	1000±100mV
	Frequency response range	20-19KHz(±2dB)
	THD	≤0.3%
	Noise	≤0.06mV
	Distance Best within	10M
Radio function (FM/AM)	AM Tuning Range	522kHz-1620kHz
	FM Tuning Range	87.00MHz-108.00MHz

# COMPACT RACK MOUNTABLE CD PLAYER WITH USB/FM/BLUETOOTH

Antenna Impedance	75 Ω
Maximum output voltage	1200±100mV
Amplitude limiting sensitivity	-80dB
Frequency response range	40-10KHz(±3dB)
Distortion	≤0.2%
SNR	≥60dB
Store/Memory function	40 pcs
Protection	AC fuse
Power supply	AC110-120V/60Hz/35W AC220-240V/50Hz/35W
Outer packing dimension (mm)	(L×W×H) 534×350×110
Machine dimension (mm)	(L×W×H) 483×210×44
Gross weight	4.4kg
Net weight	3.65kg


## FRONT PANEL

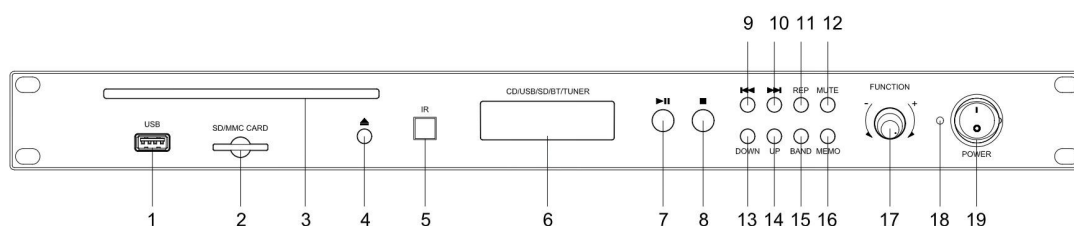

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>1. USB Interface</li> <li>2. SD Card Slot</li> <li>3. Built-in CD Disc Tray</li> <li>4. Disc IN/OUT</li> <li>5. IR Remote Control</li> <li>6. LCD Display</li> <li>7. Play/Pause</li> <li>8. Stop</li> <li>9. Previous Song/Previous Station in AM/FM</li> <li>10. Next Song/Next Station in AM/FM</li> </ul> | <ul style="list-style-type: none"> <li>11. CD Playback Mode Switch Button</li> <li>12. Mute</li> <li>13. Trim Down</li> <li>14. Trim Up</li> <li>15. AM/FM Band Selection</li> <li>16. MEMO</li> <li>17. Function/Volume</li> <li>18. Power Indicator</li> <li>19. Power Switch</li> </ul> |
|--|--|

# COMPACT RACK MOUNTABLE CD PLAYER WITH USB/FM/BLUETOOTH

## REAR PANEL

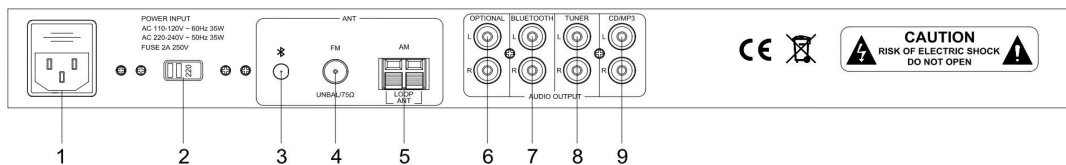

- 1. Power outlet
- 2. AC110V/220V Option Switch
- 3. Bluetooth Antenna
- 4. FM Antenna Input Interface
- 5. AM Antenna Input Interface

- 6. Alternative Output Interface
- 7. Bluetooth Output Interface
- 8. Radio Signal Output Interface
- 9. CD/MP3 Output Interface

## ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-40020111PL	COMPACT RACK MOUNTABLE CD PLAYER WITH USB/FM/BLUETOOTH	01

## ACCESSORIES INFORMATION

Description	Standard Quantity
SY542 wire(AV terminal audio wire)	01
FM antenna	01
AM antenna and antenna mount	01
2.4G Bluetooth antenna	01
Remote Controller	01
Power cord	01
User manual	01