


# ALARM CABLE

NORDEN Alarm Cables are manufactured in accordance to IEC standards. The most significant use of these cables are for Installation in Signaling and Alarm System. The cable is suitable for Wiring Burglar & Security Alarms, Public Address Systems, Detector and Sensors, Infra-red and other low voltage circuits that are power limited.

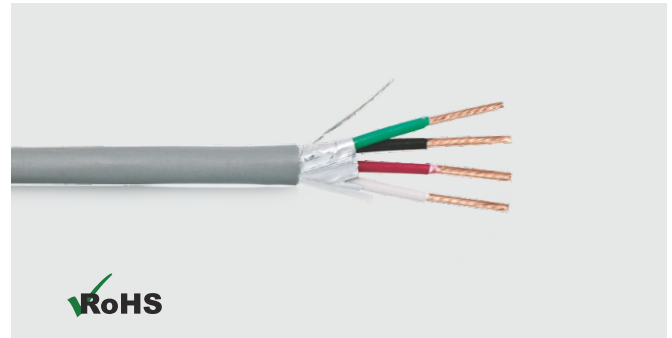

## CABLE CONSTRUCTION

### Conductor

Bare Copper Solid or Stranded Flexible section in 0.22 Sq.mm

### Shielding

Aluminium/Polyester Foil 110% Coverage

### Outer Jacket

PVC, PE or LSZH Flame Retardant meet the requirement of IEC

### Insulation

PVC (Polyvinyl Chloride) Flame Retardant meet the requirement of IEC

### Drain Wire

Bare Copper Solid or Stranded

## ORDERING INFORMATION

Part Number	Description	Core (mm)	Insulation (mm)	Outer Jacket (mm)
83-12113304	4 x 0.22 Alarm Cable PVC	7 x 0.20	0.23	3.50
83-12113306	6 x 0.22 Alarm Cable PVC	7 x 0.20	0.23	4.20
83-12113308	8 x 0.22 Alarm Cable PVC	7 x 0.20	0.23	4.60
83-12113310	10 x 0.22 Alarm Cable PVC	7 x 0.20	0.23	5.20
83-12113312	12 x 0.22 Alarm Cable PVC	7 x 0.20	0.23	5.40
83-12213304	4 x 0.22 + 2 x 0.50 Alarm Cable PVC	7 x 0.20	0.30 / 0.23	4.00
83-12213306	6 x 0.22 + 2 x 0.50 Alarm Cable PVC	7 x 0.20	0.30 / 0.23	4.00
83-12213308	8 x 0.22 + 2 x 0.50 Alarm Cable PVC	7 x 0.20	0.30 / 0.23	5.20
83-12213310	10 x 0.22 + 2 x 0.50 Alarm Cable PVC	7 x 0.20	0.30 / 0.23	5.40
83-12213312	12 x 0.22 + 2 x 0.50 Alarm Cable PVC	7 x 0.20	0.30 / 0.23	5.80
83-12313308	8 x 0.22 + 2 x 1.0 Alarm Cable PVC	7 x 0.20	0.25 / 0.25	6.5
83-12313310	10 x 0.22 + 2 x 1.0 Alarm Cable PVC	7 x 0.20	0.25 / 0.25	6.7