


# FIBRE ACCESS POINT

Norden wall / Pole Mount Fibre Access Point is designed for the external environment. This Access point can Load 1:8 or 1:16 LGX Splitter Cassette for fibre Distribution and connection. It comes with locking and earthing systems with the complete protection of fibre cables and accessories. This fibre access point box is developed for FTTH Applications.

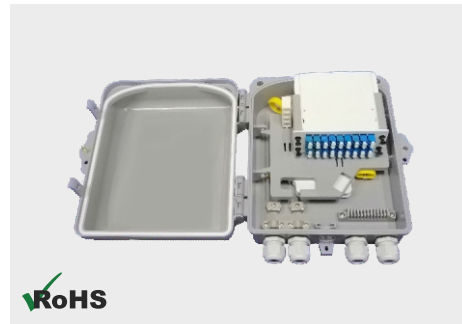

## FEATURES

- Applicable for pass-Through, Distribution, and Branching of External Fibre Optic cables
- Mechanical sealing structure
- Waterproof, IP65
- Access Point comes with a 1pc splice tray, max. 24 fibres
- Can load 2pcs 1x8 or 1pc 1x16 LGX splitter cassette
- Support Outdoor wall mounted; pole mounted

## APPLICATION

- Widely used in FTTH access Network
- Telecommunication Network
- CATV Networks

## DESIGN & MATERIALS


Mounting Type	Wall & Pole
Colour	White or Black
Material	ABS Plastic
Cable Inlet Port	2 x PG19
Cable Outlet Port	2 x PG19
Max Splicing Capacity	24F
LGX Splitter	2 Pcs 1:8 or 1 Pcs 1:16
Key Lock	Yes
Environment Temperature	-20°C to +60°C

## ACCESSORIES


Item	Spec	Qty
Heat shrinkable protection sleeve	40x2.6x1.2mm	24pcs
Cable tie	3x120mm, white color	6pcs
Screws	C type 4x30, metal	3pcs
Plastic expansion pipe	6mm, white color	3pcs
Key	ABS plastic, white color	1pc
Pole Mount kit (Optional)	12x620mm stainless tape	2pcs

# FIBRE ACCESS POINT

## DRAWING

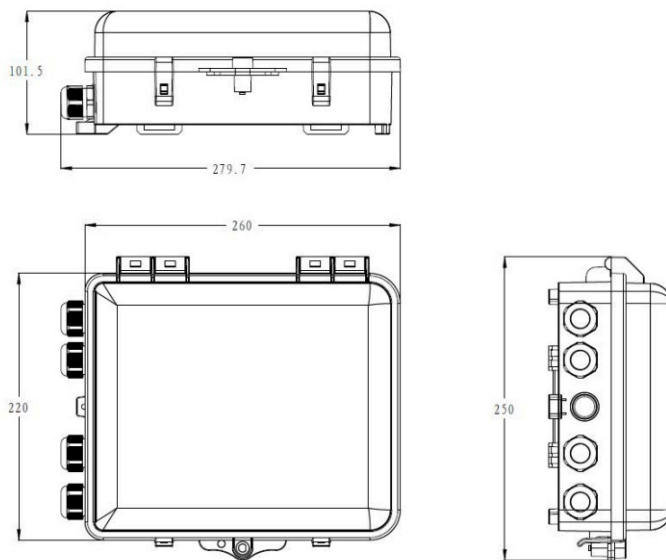

## INSTRUCTIONS

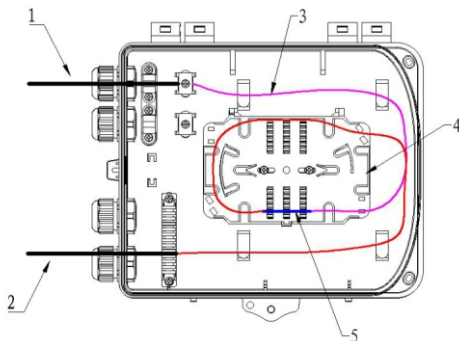

1. Fibre optic cable entry port
2. Fibre optic cable exit port
3. Fibre optic stripping fibre
4. Fibre optic splice tray
5. Fibre heat shrinkable protection sleeve

## ORDERING INFORMATION

Part Number	Description	Dimension (mm)
80F-IP65P1X	Fibre access Point Outdoor IP 65 - Pole Mounted	250x279.7x101.5
80F-IP65W1X	Fibre access Point Outdoor IP 65 - Wall Mounted	250x279.7x101.5