

ALUMINIUM HOUSING FOR BOX CAMERA



ENH-BCA66X5R

FEATURES


- Weather Protection for Camera and Lens
- Simple and Adaptable Installation
- Anti-Corrosion Support
- Sunshade Support
- IP66



SPECIFICATION

MODEL	Model No.	ENH-BCA66X5R
	Type	ALUMINIUM HOUSING FOR BOX CAMERA
GENERAL	Material	Cast Iron / Aluminium Alloy
	Color	White
	IR Distance	150 m (10pcs high power IR LED)
	Wavelength	850 nm
	Built-in Heater & Fan	Supported
	Power Supply	12V DC / PoE++ (IEEE 802.3bt)
	Max. Power Consumption	≤36W
	Working Temperature	-25°C~ 60°C
	Working Humidity	≤95% RH (non-condensing)
	Working Conditions of Temperature Control Module	Heater on: 10°C ± 3°C, Fan on: 45°C ± 3°C Heater off: 20°C ± 3°C, Fan off: 30°C ± 3°C When the heater is turned on, the fan turns on simultaneously
	Ingress Protection	IP66
	Vandal Resistant	IK10 (Housing)
	Dimensions (L × W × H)	Inner: 275×110×90 mm Outer: 471.1×172.3×125.2 mm
Window Size	110×90 mm	
Weight	2.4 Kg	

Dimension Unit : mm

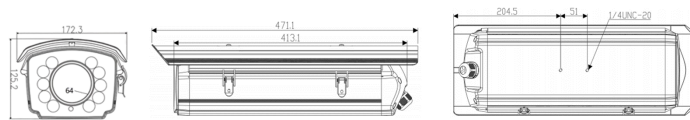

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENH-BCA66X5R	Aluminium Housing for Norden Box Camera with Heater, Fan, 150m IR and IP66 rating	1
ENB-BCX67	Wall Mount Bracket for Norden Box Camera IR Housing	1

★Product specification and availability are subject to change without notice.

ALUMINIUM HOUSING FOR BOX CAMERA



ENH-BCA66X5R

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENH-BCA67X5R		-	-