

IR ILLUMINATOR



ENI-VSV010-350R

FEATURES


24 pcs IR LED
10° ~ 40° Adjustable Beam Angle
140 ~ 350 m Distance Support
80 W IR Illuminator
IP68, IK10



SPECIFICATION

MODEL	Model No.	ENI-VSV010-350R
	Type	IR ILLUMINATOR
GENERAL	Beam Angle	10° ~ 40°
	Beam Distance	140 ~ 350 m
	Beam Angle Adjustment	Control via Pelco-D (RS485)
	Day & Night	Auto
	Color	Black
	LED	24 pcs LED
	Wavelength	850 nm
	Design Lifetime	50,000 hours
	Power Supply	24V DC/24V AC
	Serial Interface	1 x RS485
	Power Consumption	80W
	Working Temperature	-30 °C ~ 55 °C
	Ingress Protection	IP68
	Vandal Resistant	IK10
Bracket	Flexible U Bracket	
Material	Aluminium Die-Casting Housing	
Panel	Tempered Glass Panel and IR Passing Plastic	
Dimensions	220 x 160 x 74 mm	
Net Weight	2.6 kg	
INSTALLATION	Power	The power and LED panel wires must both be pointing downward to prevent water incursion
	Earthing	Lighting safety precautions must be taken and power wires must be grounded
	Settings	Modify the bolt of brightness, sensor and time, gently
	Installation	Professional electricians or quality technicians should install and adjust
	Caution	Do not open the case and remove the power supply

Dimension Unit : mm

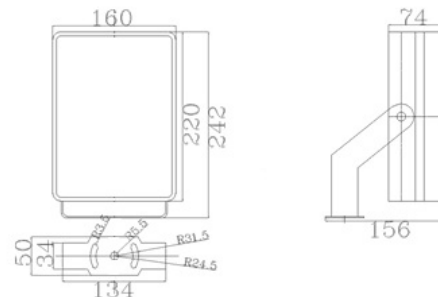

★Product specification and availability are subject to change without notice.

IR ILLUMINATOR



ENI-VSV010-350R

ORDERING INFORMATION

Part Number	Description	Standard Quantity
ENI-VSV010-350R	IR Illuminator with 24 Pieces High Power IR LED, 10° ~ 40° Adjustable Beam Angle, 140 ~ 350m IR, IP68 and IK10 Support	1

PACKING INFORMATION

Part Number	Packing Mode	Gross weight(Kg)	Dimension(mm)
ENI-VSV010-350R	Carton Box	3.0	310x210x180

★Product specification and availability are subject to change without notice.